
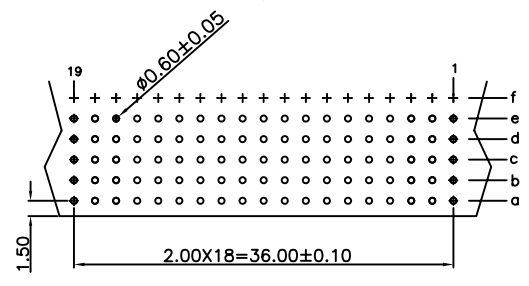
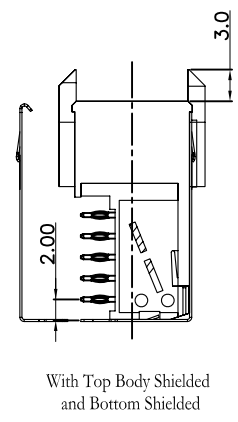
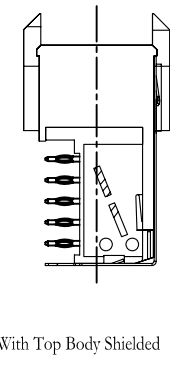
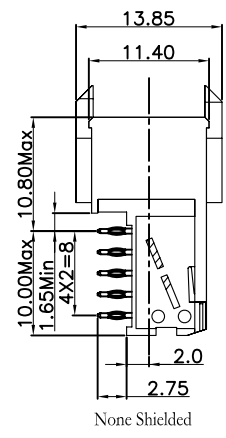
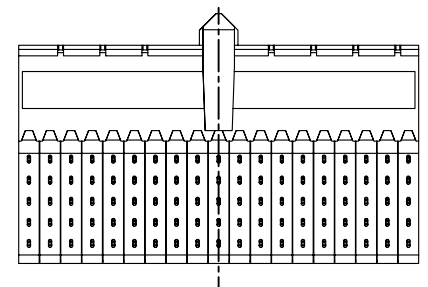
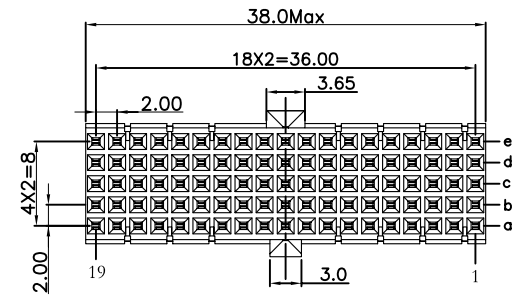


REV.	SPECIFICATION	ECN NO.	APPD.
R5		ECN121230	

Material:
Housing: Thermoplastic Polyester Glass Filled UL94V-0.
Contacts: Copper Alloy

Electrical Characteristics:
Current Rating: 1 AMP.
Dielectric Withstanding Voltage: AC 750V For 1 minute.
Insulator Resistance: 10000MΩ min. at DC 500V.
Contact Resistance: 20mΩ max. at DC 100mA.
Operating Temperature: -55°C ~ +125°C .

***RoHS Compliant**



P.C. Board Layout
(Top View)

9111- 7 2 AB 95 1 Cxx U

Series: 7Row, 2: Female, AB: Type AB, Position

U: Tube Package

Cxx: Dip Tin Contact Gold
10: 10a"
30: 30a"

CB30: Dip Tin Contact Au+Pd/Ni
30: 30a"

1: None Shielded
2: Top Body Shielded
3: Top Body Shielded and Bottom Shielded (Package Separately)

Tolerances	Dwg. No.	9111D72012	Title:		9111 Series Hard Metric Connector Female Right Angle Type AB-19	OUPIN OUPIN ELECTRONIC(KUNSHAN) CO., LTD.				
x = ±0.5	Projection					P/N:	9111-72AB95xCxxU			
.x = ±0.25	Unit	mm	Scale	1:1		SHEET	1/1	Ver.No.		R5
.xx = ±0.15	Drawn By	CQ 12/14'12								