
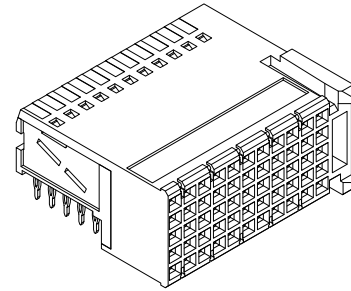


REV.	SPECIFICATION	ECN NO.	APPD.
R3		ECN170528	

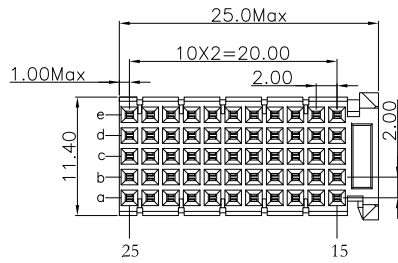

Material:

Housing: Thermoplastic Polyester Glass Filled UL94V-0.

Contacts: Copper Alloy

Electrical Characteristics:

Current Rating: 1 AMP.



Dielectric Withstanding Voltage: AC 750V For 1 minute.

Insulator Resistance: 10000MΩ min. at DC 500V.


Contact Resistance: 20mΩ max. at DC 100mA.

Operating Temperature: -55°C ~+125°C .


***RoHS Compliant**

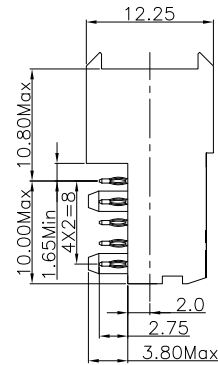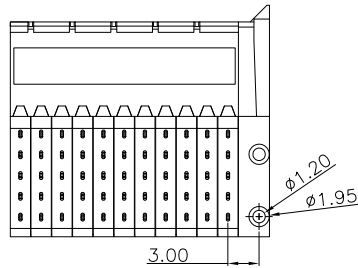


None Shielded




With Top Body Shielded



With Top Body Shielded and Bottom Shielded

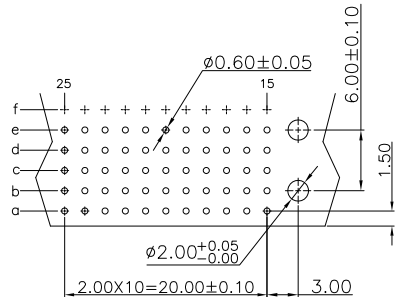

P.C. Board Layout
(Top View)

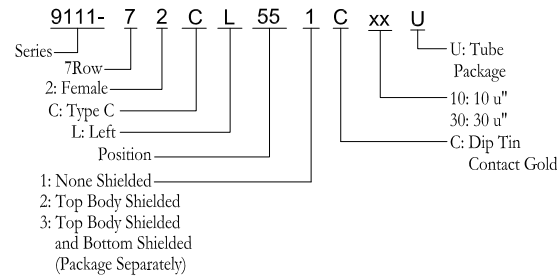

Tolerances	Dwg. No.	9111D72006	
x = ±0.5	Projection	⊕ ↗	
.x = ±0.25	Unit	mm	Scale 1:1
.xx = ±0.15	Drawn By	LQ 05/17'17	

Title: 9111 Series
Hard Metric Connector
Female Right Angle Type C

OUPIN			
OUPIN ELECTRONIC(KUNSHAN) CO., LTD.			
P/N: 9111-72CL55xCxxU			
SHEET	1/1	Ver.No.	R3