

REV.	SPECIFICATION	ECN NO.	APPD.
R4		ECN121230	






**Material:**

Housing: Thermoplastic Polyester Glass Filled UL94V-0.  
 Contacts: Copper Alloy


**Electrical Characteristics:**

Current Rating: 1 AMP.  
 Dielectric Withstanding Voltage: AC 750V For 1 minute.  
 Insulator Resistance: 10000MΩ min. at DC 500V.  
 Contact Resistance: 20mΩ max. at DC 100mA.  
 Operating Temperature: -55°C ~+125°C .


**\*RoHS Compliant**

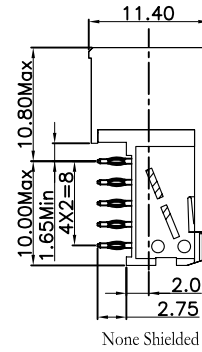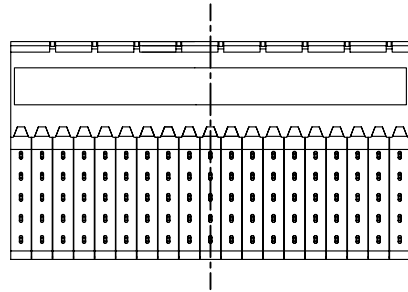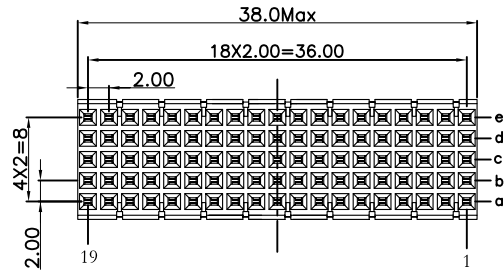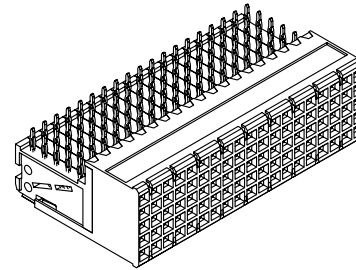


With Top Body Shielded



With Top Body Shielded and Bottom Shielded

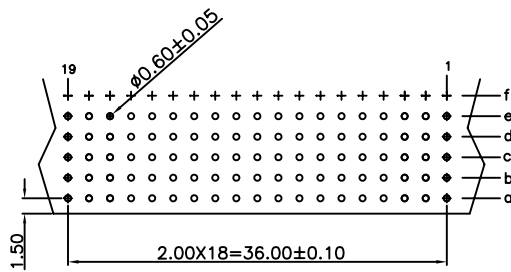

P.C. Board Layout  
(Top View)

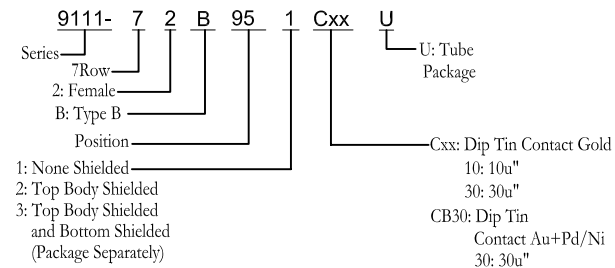

<b>Tolerances</b>	<b>Dwg. No.</b>	9111D72004		<b>Title:</b>		<b>OUPIN</b> OUPIN ELECTRONIC(KUNSHAN) CO., LTD.	
x = ±0.5	<b>Projection</b>	⊕		9111 Series			
.x = ±0.25	<b>Unit</b>	mm	<b>Scale</b>	Hard Metric Connector		P/N: 9111-72B95xCxxU	
.xx = ±0.15	<b>Drawn By</b>	CQ	12/14'12	Female Right Angle Type B-19		<b>SHEET</b>	1/1
						<b>Ver.No.</b>	R4