
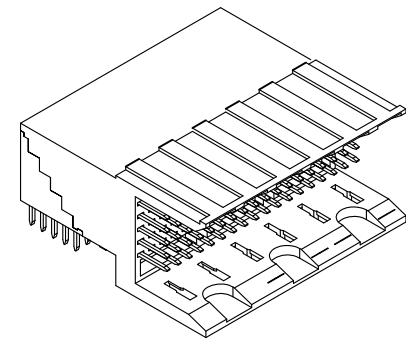






REV.	SPECIFICATION	ECN NO.	APPD.
R7		ECN210840	

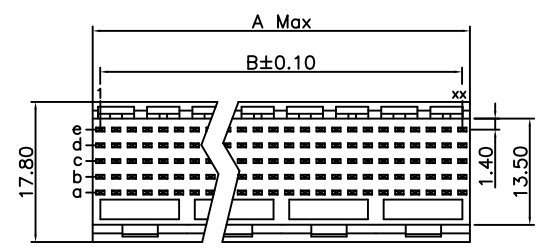

Material and Plating:
Housing: LCP, UL94V-0 Ivory .
Contacts: Brass
Gold Plated on Contact Area and 80 μ" min Tin or Gold Flash Plated on solder tail over 50 μ" min Nickel.

Electrical Characteristics:
Current Rating: 1 AMP.
Dielectric Withstanding Voltage: AC 1000V For 1 minute.
Insulator Resistance: 1000MΩ min. at DC 500V.
Contact Resistance: 30mΩ max. at DC 100mA.
Operating Temperature: -55°C ~+125°C .

***RoHS Compliant**

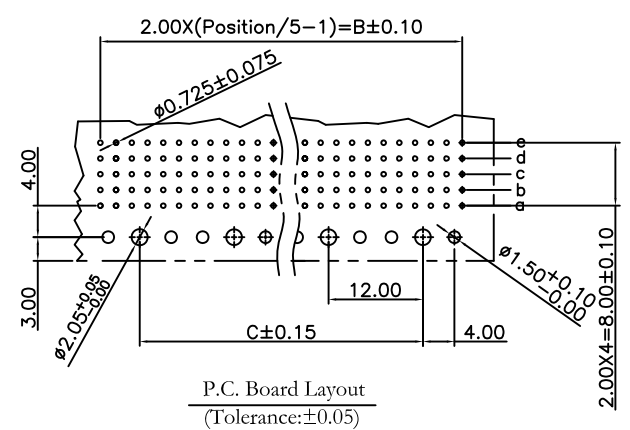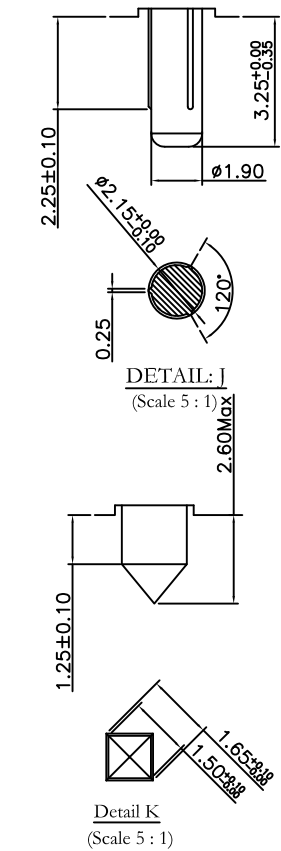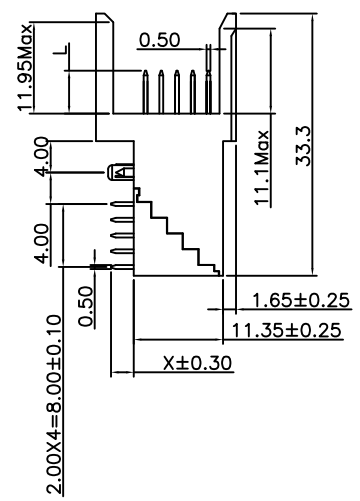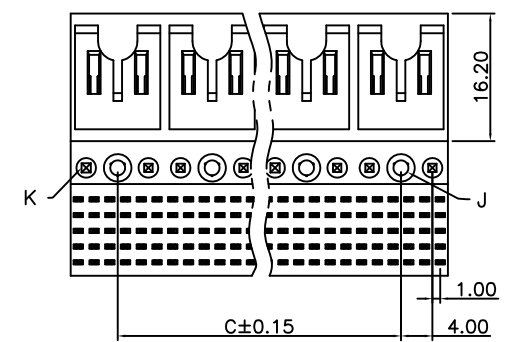

9111- 5 5 xx x x C xx D U
Series | 5: 5Rows | 5: Male Signal | Position | A: A ~ H Contact Length | C: Dip Tin Contact Gold | G: Gold Plated | 1: Dip Length | 2: Dip Length | U: Tube Package | D: Dip Type | 10: 10 μ" | 30: 30 μ"

Contact Length (L)	A	5.00	
	B	5.75	
	E	6.50	
	F	7.25	
	H	8.00	
Dip Length (X)	1	2	
	2.90	3.53	
Position (n)	Dimension		
	A	B	C
30	11.95	10	
60	23.95	22	12
90	35.95	34	24
120	47.95	46	36
150	59.95	58	48
180	71.95	70	60
210	83.95	82	72
240	95.95	94	84

Tolerances	Dwg. No.	9111D55002	Title:		9111 Series H.D.2.0mm(0.079") Futurebus(+)5 Rows Male Right Angle Type	 OUPIIN ELECTRONIC(KUNSHAN) CO., LTD. P/N: 9111-55xxxxCxxDU SHEET 1/1 Ver.No. R7	
x = ±0.5	Projection		Unit	mm	Scale		1:1
.x = ±0.25	Drawn By	ZY 08/31'21					
.xx = ±0.15							