


REV.	SPECIFICATION	ECN NO.	APPD.
R5		ECN160444	








Material and Plating:

Housing: High Temperature Plastic UL94V-0.
 Contacts: Copper Alloy
 10u" gold plated on Contact Area and 80~160u"
 Tin Plated on Solder Tail over nickel 50-120u" under plated .


Electrical Characteristics:

Current Rating: 3 AMP.
 Dielectric Withstanding Voltage: AC 1000V For 1 minute.
 Insulator Resistance: 1000MΩ min. at DC 500V.
 Contact Resistance: 30mΩ max. at DC 100mA.
 Operating Temperature: -55°C~+125°C .


***RoHS Compliant**

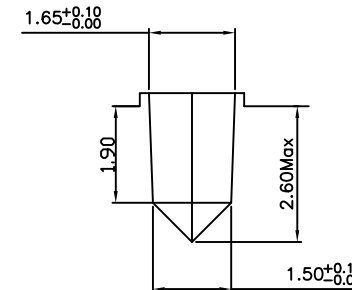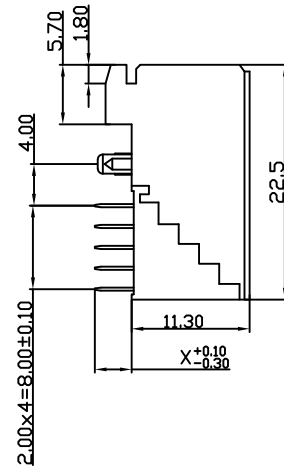

DETAIL: K
(Scale 4:1)

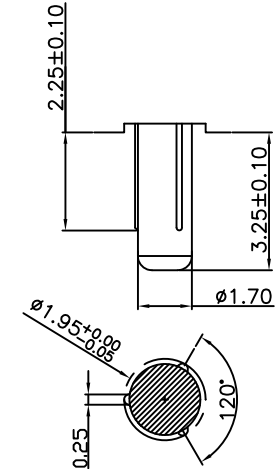

DETAIL: J
(Scale 4:1)

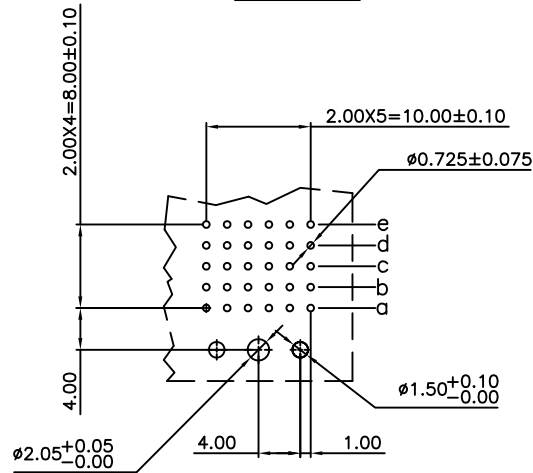

P.C. Board Layout

9111- 5 4 10 x C xx D U
 Series
 5: 5Rows
 4: Female
 Position
 1: Dip Length
 2: Dip Length
 C: Selective Gold Plated
 U: Tube Package
 D: Dip Type
 P: Press Fit Type
 10: 10 μ"
 30: 30 μ"

Tolerances	Dwg.No.	9111D54001	Title:
x = ±0.5	Projection		9111 Series
.x = ±0.25	Unit	mm	H.D. Male 2.0mm(0.079")
.xx = ±0.15	Scale	1:1	Futurebus(+) 5 Rows
	Drawn By	LQ 04/22'16	Female Dip Type

X	1	2
Length	2.90mm	3.53mm

OUPIN ELECTRONIC(KUNSHAN) CO., LTD.			
P/N: 9111-5410xCxxDU			
SHEET	1/1	Ver.No.	R5