

REV.	SPECIFICATION	ECN NO.	APPD.
R7		ECN170312	





Material:

Housing: Thermoplastic Polyester Glass Filled UL94V-0.
 Contacts: Copper Alloy.


Electrical Characteristics:

Current Rating: 1 AMP.
 Dielectric Withstanding Voltage: AC 750V For 1 minute.
 Insulator Resistance: 10000MΩ min. at DC 500V.
 Contact Resistance: 20mΩ max. at DC 100mA.
 Operating Temperature: -55°C ~+125°C .


***RoHS Compliant**

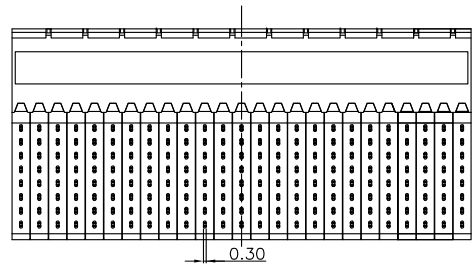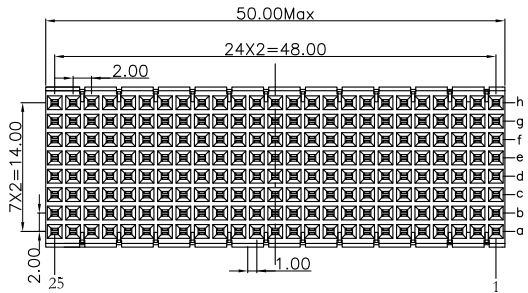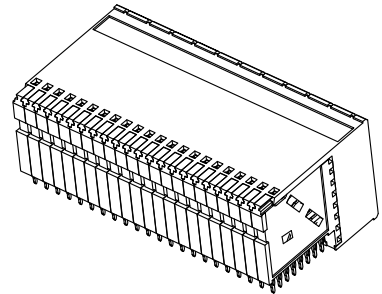


None Shielded



With Top Body Shielded



With Top Body Shielded and Bottom Shielded

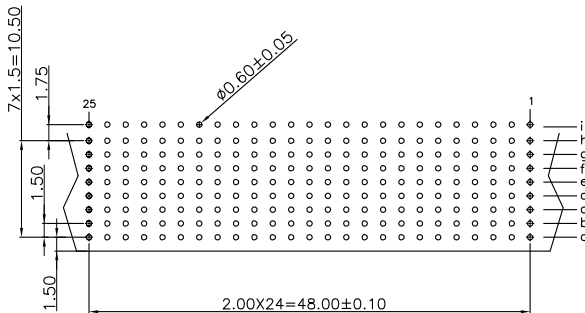

P.C. Board Layout
(Top View)

9111- 10 2 E 200 x CB 30 U
 Series 10Row 2: Female E: Type E Position
 U: Tube package
 30: 30 u"
 CB: Dip Tin Plated Contact Au+Pd/Ni Plated

1: None Shielded
 2: Top Body Shielded
 3: Top Body Shielded and Bottom Shielded (Package Separately)

Tolerances	Dwg. No.	9111-D0000-011
x = ±0.5	Projection	
.x = ±0.25	Unit	mm
.xx = ±0.15	Scale	1:1
	Drawn By	zbs 03/17'17

Title: 9111 Series
 Hard Metric Connector
 Female Right Angle Type E-25

OUPIN			
OUPIN ELECTRONIC(KUNSHAN) CO., LTD.			
P/N: 9111-102E200xCB30U			
SHEET	1/1	Ver.No.	R7