REV.	SPECIFICATION	ECN NO.	APPD.
R1			

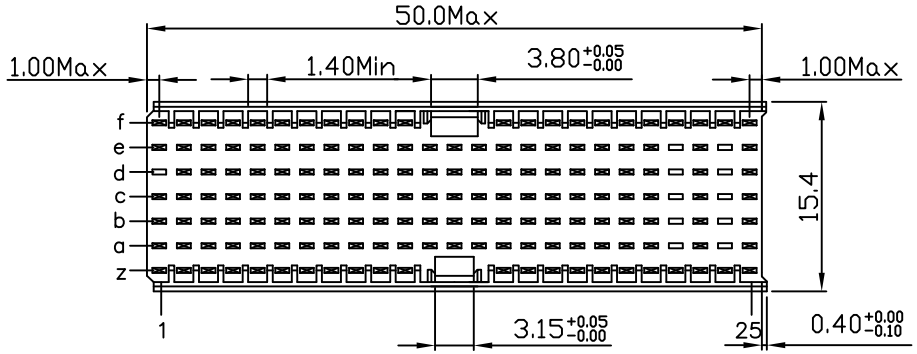

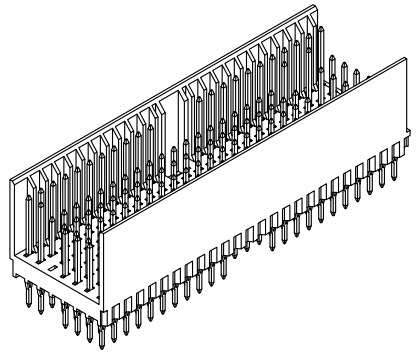

Material:

Housing: Thermoplastic Polyester Glass Filled UL94V-0
Contacts: Copper Alloy.

Electrical Characteristics:

Current Rating: 1 AMP.
Dielectric Withstanding Voltage: AC 750V For 1 minute.
Insulator Resistance: 10000MΩ min.at DC 500V.
Contact Resistance: 20mΩ max.at DC 100mA.
Operating Temperature: -55°C ~ +125°C .

***RoHS Compliant**

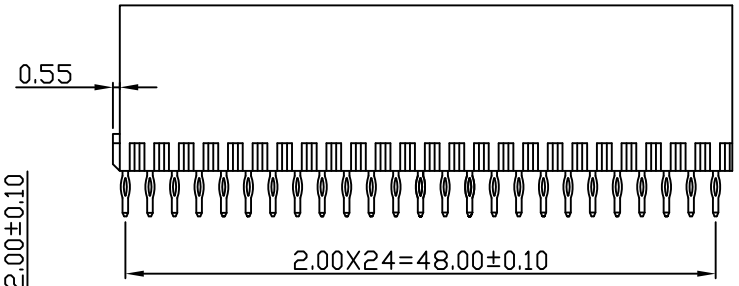

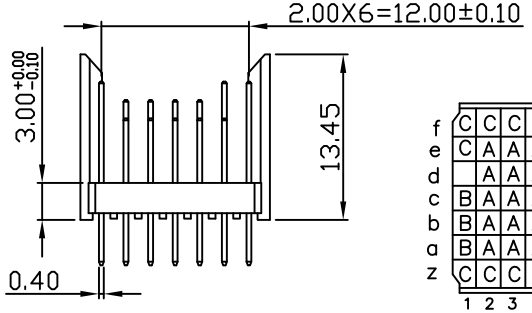

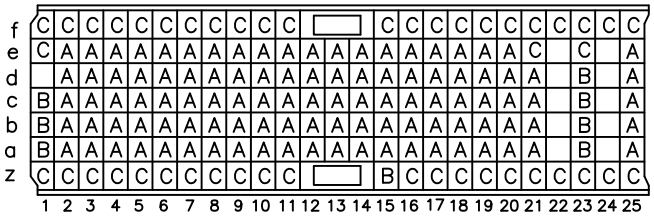

CONTACT LAYOUT

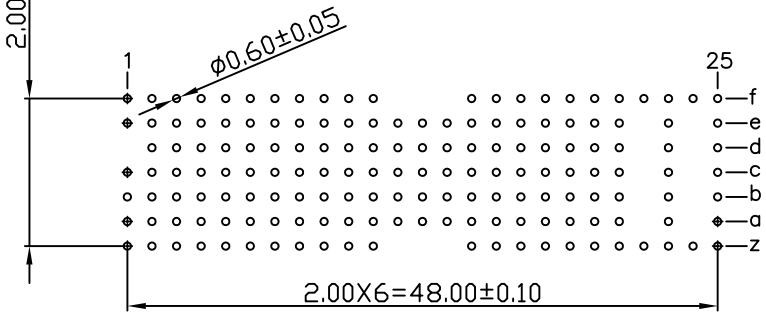

P.C. Board Layout
(Top View)

9111- 7 1 AB 169 G C xx U

- Series: 7Row
- 1: Male
- AB: Type AB
- Housing Type: G: G Option
- C: Dip Tin / Contact Gold / G: Gold
- U: Tube Package
- 10: 10 u" / 30: 30 u"

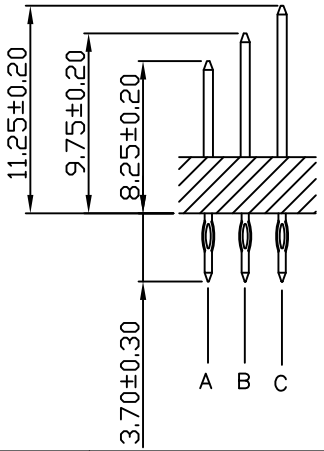

Tolerances	Dwg. No.	9111D71115	Title: 9111 Series 2.00 Hard Metric Connectors Male Type AB–25	OUPIIN ELECTRONIC(KUNSHAN) CO., LTD.	
x = ±0.5 .x = ±0.25 .xx = ±0.15	Projection			P/N:	9111–71AB169GCxxU
	Unit mm	Scale 1:1		SHEET 1/1	Ver.No. R1
	Drawn By	Zhu QL 08/15'12			