

REV.	SPECIFICATION	ECN NO.	APPD.
X3			








Material:

Housing: Thermoplastic Polyester Glass Filled UL94V-0.
 Contacts: Copper Alloy.

Electrical Characteristics:

Current Rating: 1 AMP.
 Dielectric Withstanding Voltage: AC 750V For 1 minute.
 Insulator Resistance: 10000MΩ min. at DC 500V.
 Contact Resistance: 20mΩ max. at DC 100mA.
 Operating Temperature: -55°C~+125°C .

***RoHS Compliant**

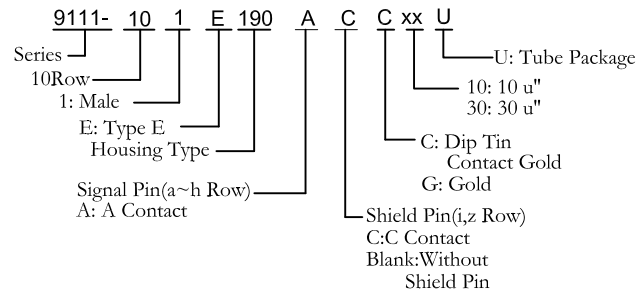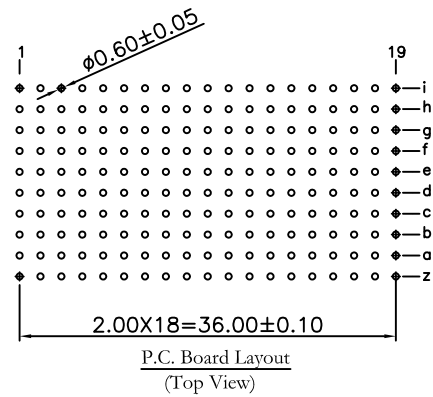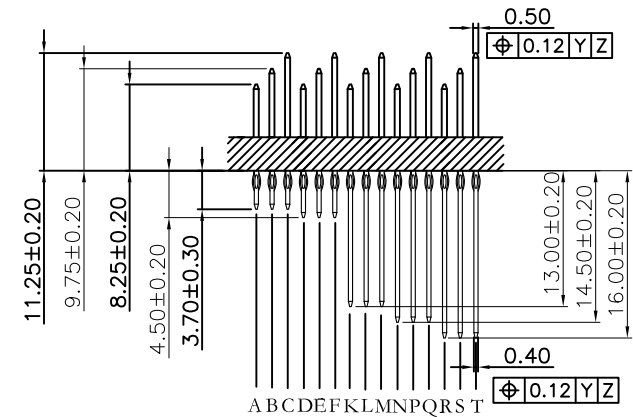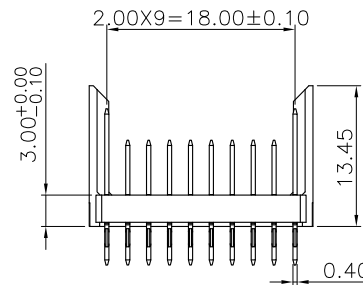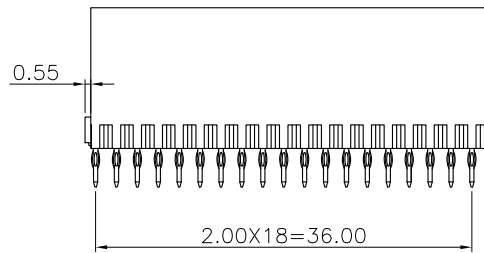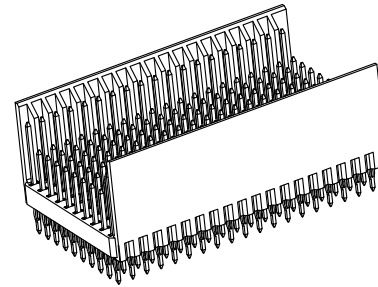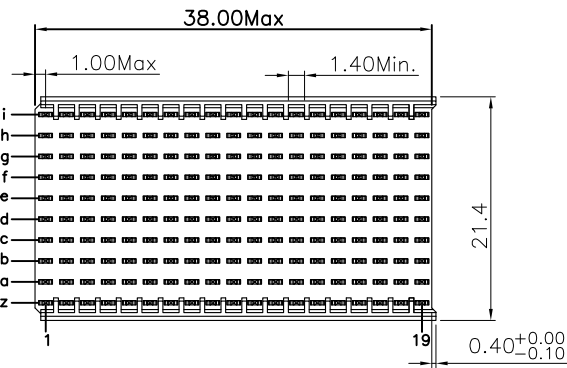

Tolerances x = ±0.50 .x = ±0.25 .xx = ±0.15	Dwg No.	9111D10103		Title: 9111 Series Hard Metric Connector Male Type E	 OUPIN ELECTRONIC(KUNSHAN) CO., LTD. P/N: 9111-101E190ACCxxU			
	Projection							
	Unit	mm	Scale		1:1			
Drawn By	MXM	07/24'17						

