REV.	SPECIFICATION	ECN NO.	APPD.
R8		ECN170312	

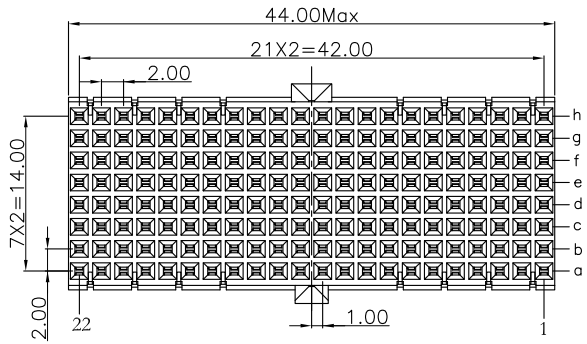

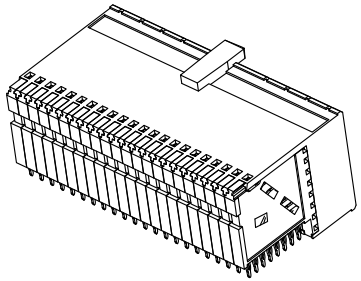

Material:

Housing: Thermoplastic Polyester Glass Filled UL94V-0.
Contacts: Copper Alloy.

Electrical Characteristics:

Current Rating: 1 AMP.
Dielectric Withstanding Voltage: AC 750V For 1 minute.
Insulator Resistance: 10000MΩ min. at DC 500V.
Contact Resistance: 20mΩ max. at DC 100mA.
Operating Temperature: -55°C ~+125°C .
*RoHS Compliant

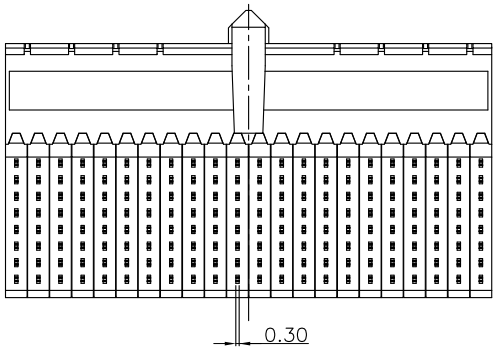

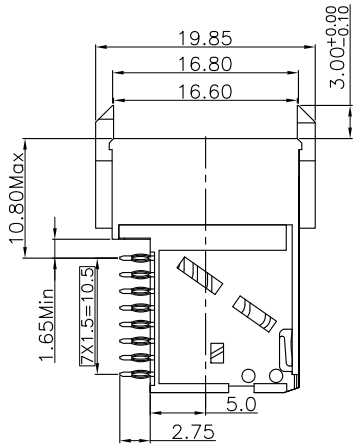

None Shielded



With Top Body Shielded



With Top Body Shielded
and Bottom Shielded

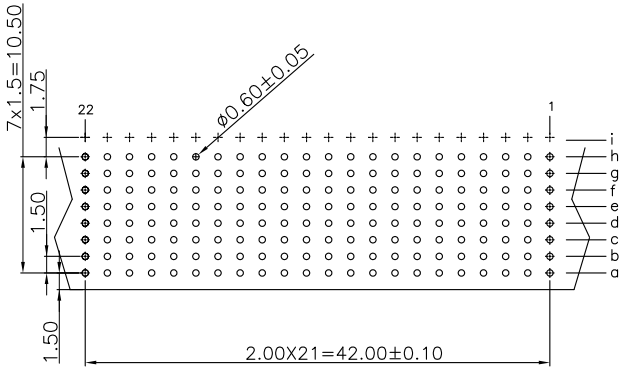

P.C. Board Layout
(Top View)

9111- 10 2 DE 176 x CB 30 U

- Series: 9111-
- 10Row: 10
- 2: Female: 2
- DE: Type DE: DE
- Position: 176
- 1: None Shielded / 2: Top Body Shielded / 3: Top Body Shielded and Bottom Shielded (Package Separately): x
- CB: Dip Tin Plated Contact Au+Pd/Ni Plated: CB
- 30: 30 u": 30
- U: Tube package: U

Tolerances	Dwg. No.	9111-D0000-009	Title: 9111 Series Hard Metric Connector Female Right Angle Type DE-22	OUPIIN ELECTRONIC(KUNSHAN) CO., LTD.
x = ±0.5 .x = ±0.25 .xx = ±0.15	Projection			P/N: 9111-102DE176xCB30U
	Unit mm	Scale 1:1		SHEET 1/1 Ver.No. R8
	Drawn By	zbs 03/17'17		