

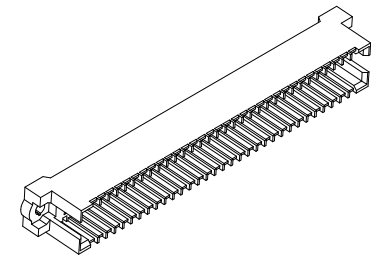
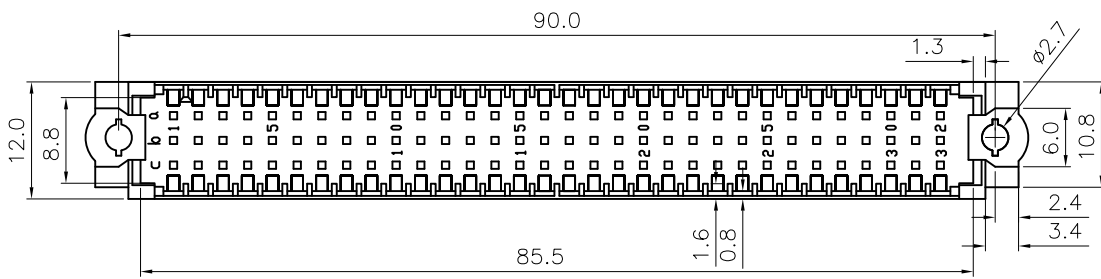
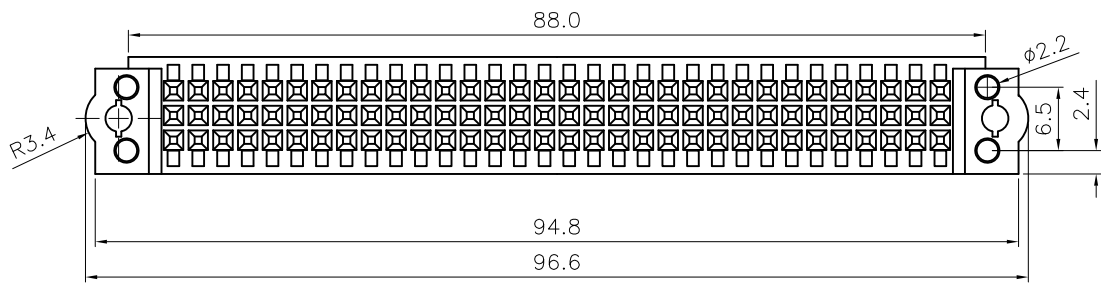


REV.	SPECIFICATION	ECN NO.	APPD.
R2			



**Material:**  
Housing: Thermoplastic Polyester Glass Filled UL94V-0  
**Electrical Characteristics:**  
Operating Temperature: -55°C~+125°C .  
**\*RoHS Compliant**

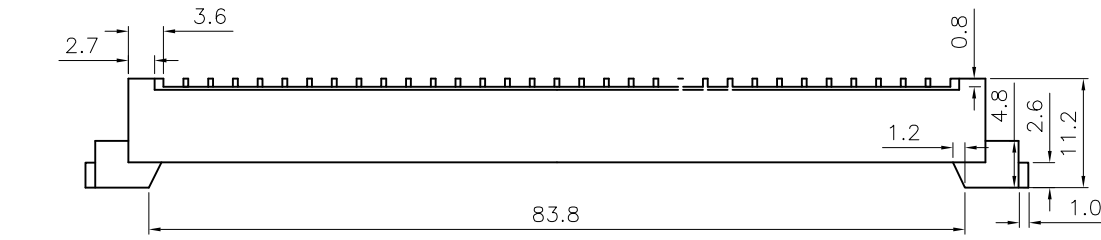

Series **9001-A** **1** **3** **Y2** **B**  
1:2.54mm  
3:Male  
B: Bulk Package  
Y: Grey

Tolerances	Dwg. No.	9001D13092	
x = ±0.5	Projection	⊕ ↗	
.x = ±0.25	Unit	mm	Scale 1:1
.xx = ±0.15	Drawn By	XCY06/30"12	

Title: 9001-A Series  
DIN41612 3 Rows  
96P Shroud

<b>OUPIN</b>			
OUPIN ELECTRONIC(KUNSHAN) CO., LTD.			
P/N: 9001-A13Y2B			
SHEET	1/1	Ver.No.	R2