



REV.	SPECIFICATION	ECN NO.	APPD.
X2			

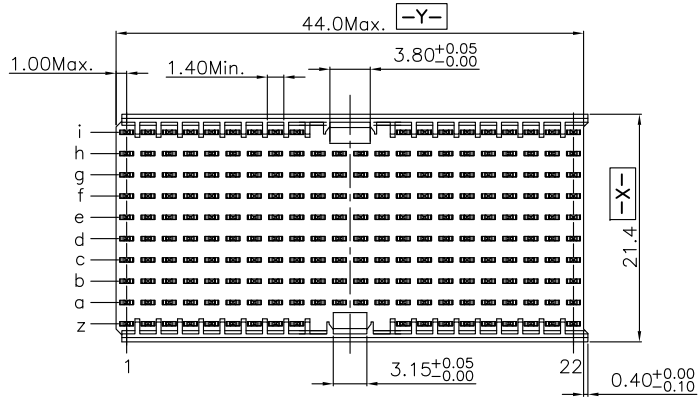





**Material:**

Housing: Thermoplastic Polyester Glass Filled UL94V-0.  
Contacts: Copper Alloy.

**Electrical Characteristics:**

Current Rating: 1 AMP.  
Dielectric Withstanding Voltage: AC 750V For 1 minute.  
Insulator Resistance: 10000MΩ min.at DC 500V.  
Contact Resistance: 20mΩ max.at DC 100mA.  
Operating Temperature: -55°C ~ +125°C.

**\*RoHS Compliant**

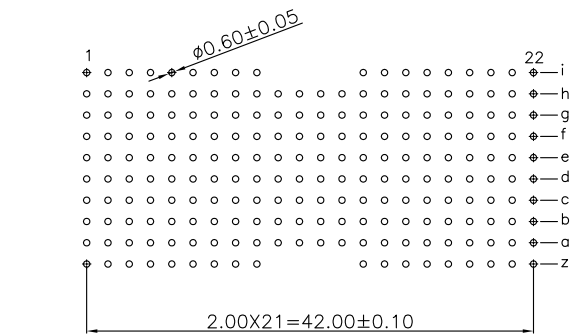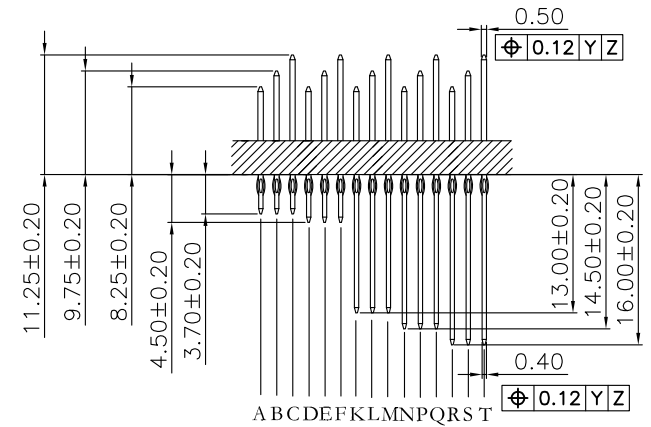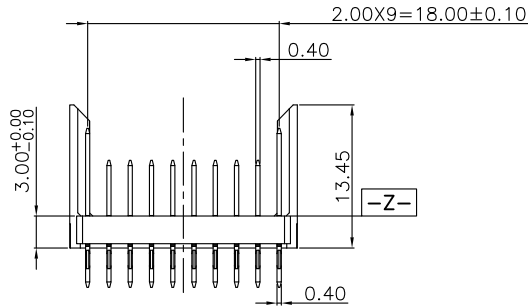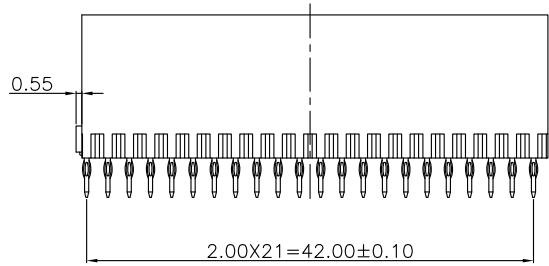

P.C. Board Layout  
(Top View)

9111- 10 1 DE 212 x x Cxx U  
 Series: 9111- 10 1 DE 212 x x Cxx U  
 10Row: 10  
 1: Male  
 DE: Type DE  
 Housing Type: U: Tube Package  
 Signal Pin(a~h Row): Cxx: Dip Tin Contact Gold  
 x: A~T Contact 10: 10u"  
 30: 30u"  
 Shield Pin(i,z Row): CB30: Dip Tin  
 x: A~T Contact Contact Au+Pd/Ni  
 Blank: Without 30: 30u"  
 Shield Pin


Tolerances	Dwg. No.	9111D10105	
x = ±0.50	Projection	⊕ ◀	
.x = ±0.25	Unit	mm	Scale 1:1
.xx = ±0.15	Drawn By	LQ 05/15'17	

Title: 9111 Series  
2.00 Hard Metric  
Connectors Male  
Type DE-22

<b>OUPIN</b>			
OUPIN ELECTRONIC(KUNSHAN) CO., LTD.			
P/N: 9111-101DE212xxCxxU			
SHEET	1/2	Ver.No.	X2


REV.	SPECIFICATION	ECN NO.	APPD.
X2			

CONTACT LAYOUT

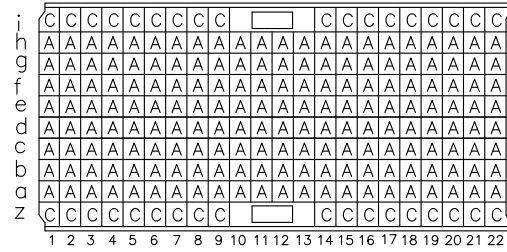


9111-101DE212ACCxxU

CONTACT LAYOUT

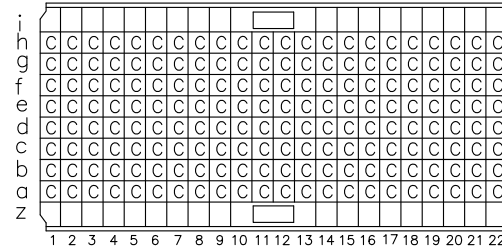


9111-101DE212CCBxxU

CONTACT LAYOUT

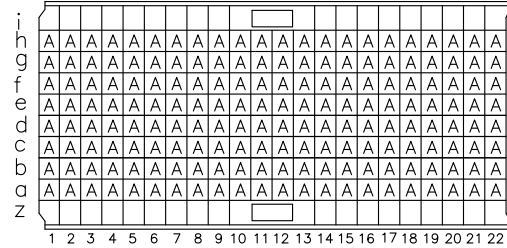



9111-101DE212ACxxU

CONTACT LAYOUT

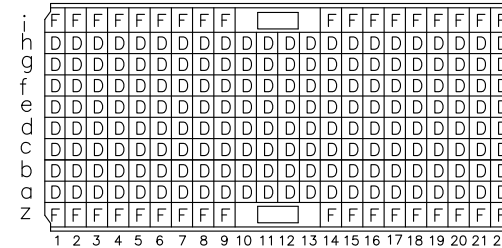

9111-101DE212DFCB30U

Tolerances	Dwg. No.	9111D10105		Title:	9111 Series 2.00 Hard Metric Connectors Male Type DE-22	 <b>OUPIIN ELECTRONIC(KUNSHAN) CO., LTD.</b>			
	$x = \pm 0.50$	Projection							
	$.x = \pm 0.25$	Unit	mm			Scale	1:1	SHEET	2/2
$.xx = \pm 0.15$	Drawn By	LQ 05/15'17							