
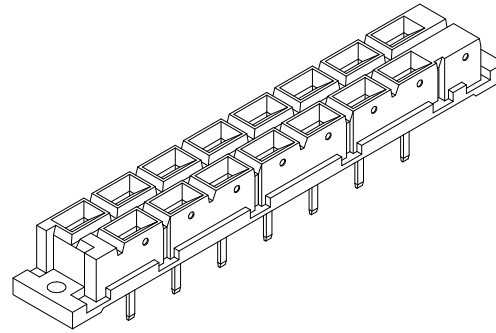


REV.	SPECIFICATION	ECN NO.	APPD.
R3		ECR190126	

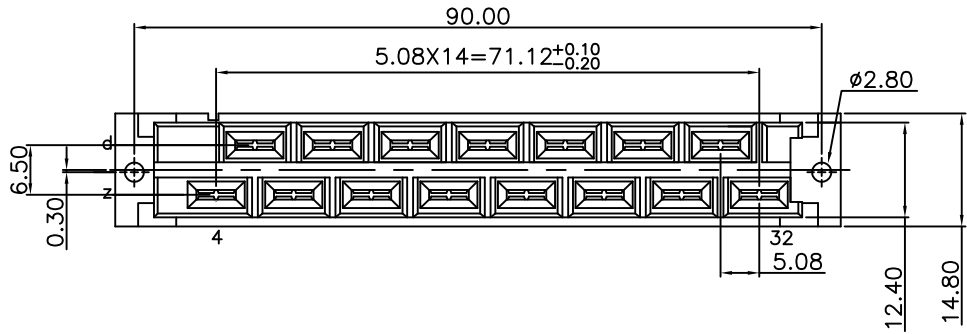





Material and Plating:

Housing: PBT ,UL94V-0, Beige .
 Contacts: Copper Alloy.
 100u" Min Ag or 80u" Min Tin Plated over Nickel
 50u" Min.

Electrical Characteristics:

Current Rating: 15 AMP.
 Dielectric Withstanding Voltage: AC 3100V for 1minute.
 Insulator Resistance: 1000MΩ min. at DC 500V.
 Contact Resistance: 8mΩ max. at DC 100m A.
 Operating Temperature: -55°C ~ +125°C .

* **RoHS Compliant**

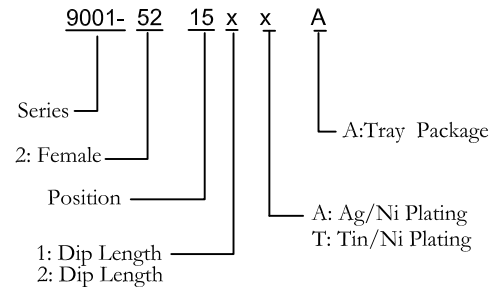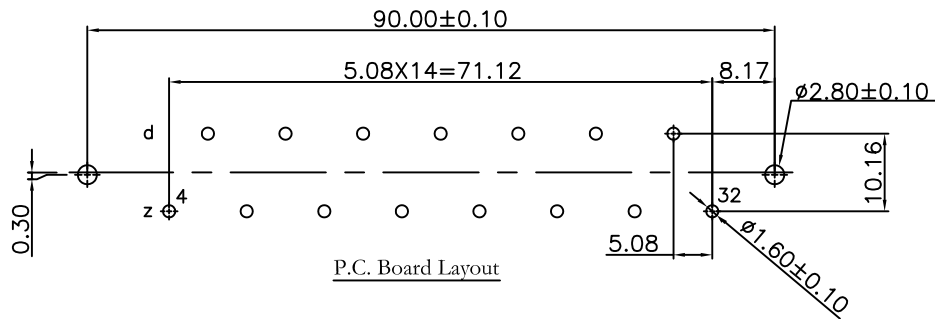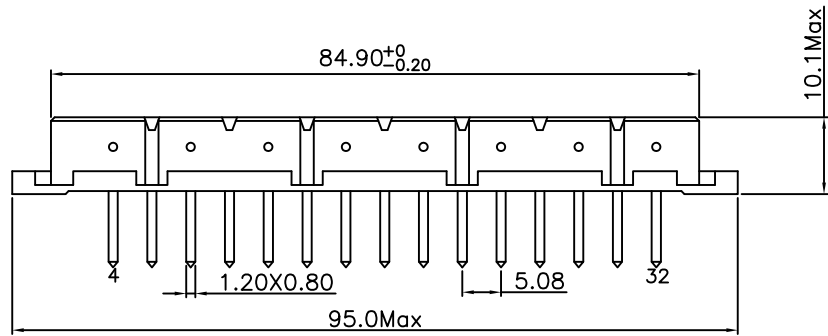

X Plating	A	T
	Ag/Ni	Tin/Ni
X length	1	2
	4.00	10.00

Tolerances	Dwg No.	9001D52001	Title:		9001 Series DIN41612 H15 Female Type	 OUPIN ELECTRONIC(KUNSHAN) CO., LTD. P/N: 9001-5215xxA
x = ±0.5	Projection					
.x = ±0.25	Unit	mm	Scale	1:1		
.xx = ±0.15	Drawn By	XFF	01/11'19			
SHEET		1/1	Ver. No.	R3		