
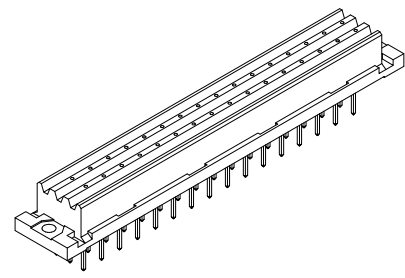


REV.	SPECIFICATION	ECN NO.	APPD.
R2		ECN141237	

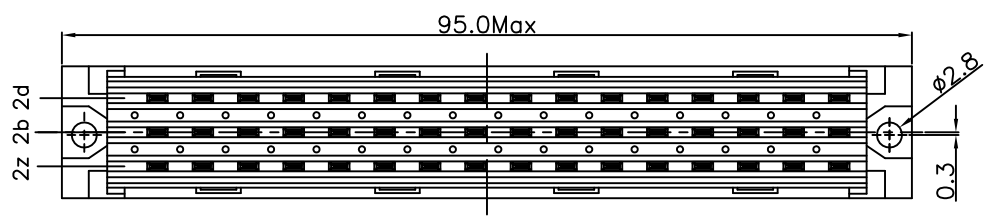





Material:

Housing: Thermoplastic Polyester Glass Filled UL94V-0.
 Contacts: Copper Alloy.

Electrical Characteristics:

Current Rating: 5.6 AMP.
 Dielectric Withstanding Voltage: AC 1550V For 1 minute.
 Insulator Resistance: 1000MΩ min. at DC 500V.
 Contact Resistance: 15mΩ max. at DC 100mA.
 Operating Temperature: -55°C~+125°C .

***RoHS Compliant**

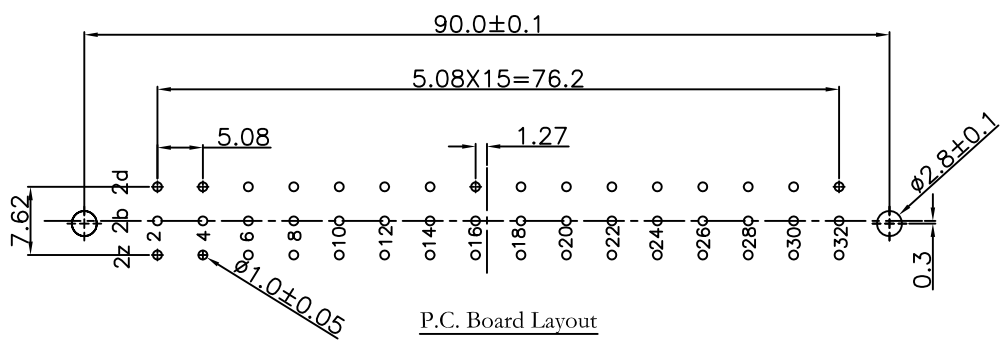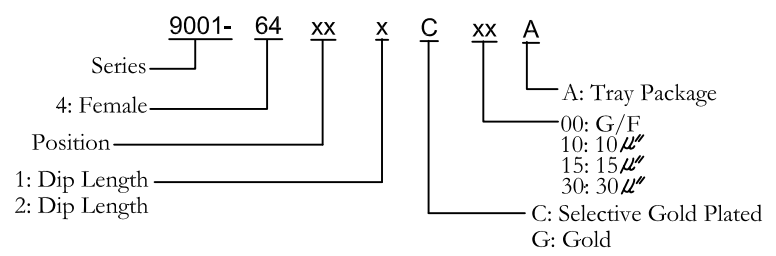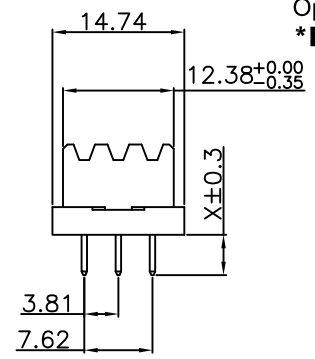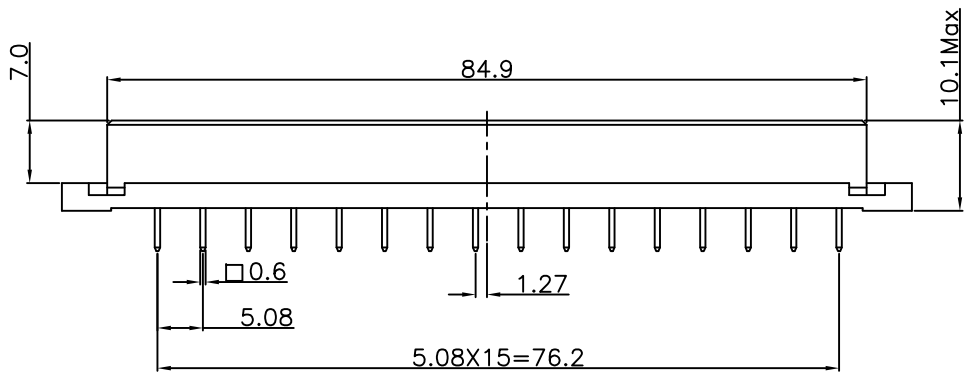

Pitch	Position	Rows with Contacts	x length		Contact Arrange
			1	2	
5.08mm	48	z b d	3.7	4.5	
	32	z - d			
	16	z - -			

Tolerances	Drawn No.	9001D64001
x = ±0.5	Projection	
.x = ±0.25	Unit	mm
.xx = ±0.15	Scale	1:1
	Drawn By	zbs 01/12'15

Title: 9001 Series
 DIN41612
 F Type Female Low Profile



OUPIN ELECTRONIC(KUNSHAN) CO., LTD.			
P/N: 9001-64xxxCxxA			
SHEET	1/1	Ver.No.	R2