
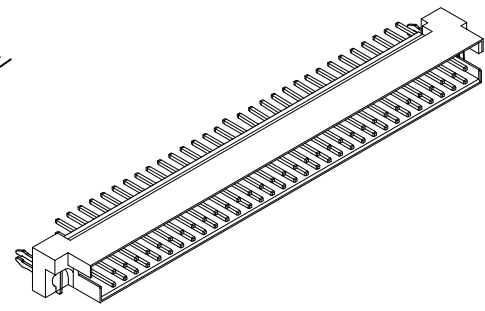


REV.	SPECIFICATION	ECN NO.	APPD.
R2		ECN210406	

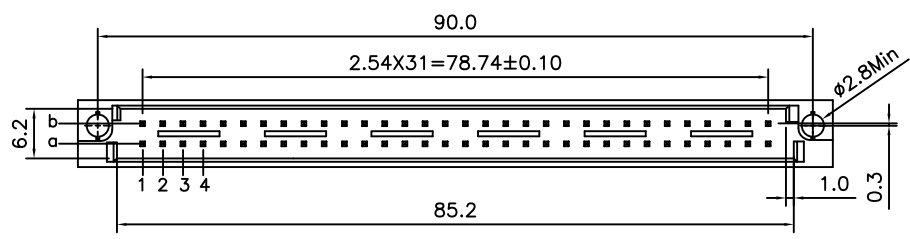





Material and Plating:

Housing: PBT, UL94V-0, Beige
 Lock: Phosphor Bronze
 Contacts: Brass
 Gold Plated on Contact Area and 80u" Min Tin or Gold Flash Plated on Press Fit over 50u" Min Nickel.

Electrical Characteristics:


Current Rating: 2 AMP.
 Dielectric Withstanding Voltage: AC 1000V For 1 minute.
 Insulator Resistance: 1000MΩ min. at DC 500V.
 Contact Resistance: 20mΩ max. at DC 100mA.
 Operating Temperature: -55°C~+125°C.

***RoHS Compliant**

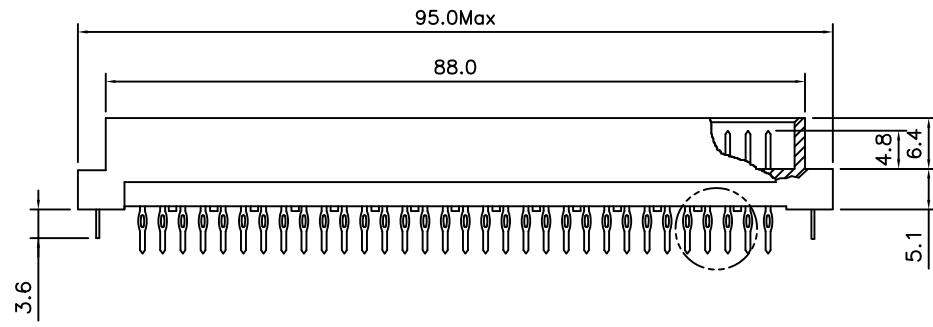

Dip Type

Press Fit Type

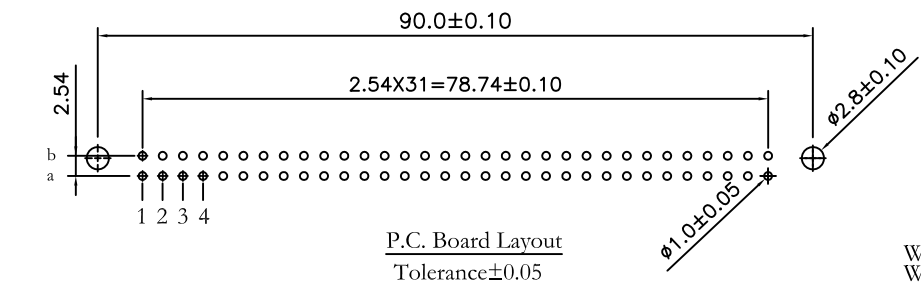

9001- 3 3 xx x C xx x L1 A
 Series
 3: 2.54mm
 3: Male
 Position
 1: Dip Length
 2: Dip Length
 W1: Dip Length
 W2: Dip Length
 A: Tray Package
 Blank: W/O Lock
 L1: With Lock
 Blank: Dip
 P: Press Fit
 00: G/F
 10:10u"
 15:15u"
 30:30u"
 C: Dip Tin Contact Gold
 G: Gold Plated

X length	1	2	W1	W2
	4.0	2.5	13	17
Y length	4.6	6.3	13	17

Pitch	Position	Rows with Contacts	Contact Arrange	P/N
2.54mm	64	a b		9001-3364xCxxxL1A
	32	a -		9001-3332xCxxxL1A

Tolerances	Dwg. No.	9001D33011		Title:	
x = ±0.5	Projection			9001 Series DIN41612 Q Type	
.x = ±0.25	Unit	mm	Scale		1:1
.xx = ±0.15	Drawn By	ZY 04/12'21			

OUPIN
OUPIN ELECTRONIC(KUNSHAN) CO., LTD.
 P/N: 9001-33xxxCxxxL1A
 SHEET 1/1 Ver. No. R2