
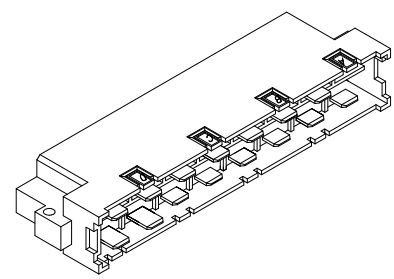


REV.	SPECIFICATION	ECN NO.	APPD.
R4		ECN140535	

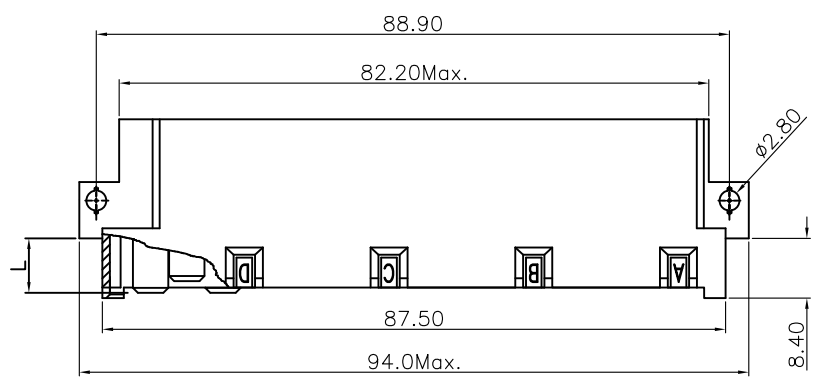





Material:

Housing: Thermoplastic Polyester Glass Filled UL94V-0.
 Contacts: Copper Alloy.

Electrical Characteristics:

Current Rating: 15 AMP.
 Dielectric Withstanding Voltage: AC 3100V For 1 minute.
 Insulator Resistance: 1000M Ω min. at DC 500V.
 Contact Resistance: 8m Ω max. at DC 100mA.
 Operating Temperature: -55 $^{\circ}$ C ~+125 $^{\circ}$ C .

***RoHS Compliant**

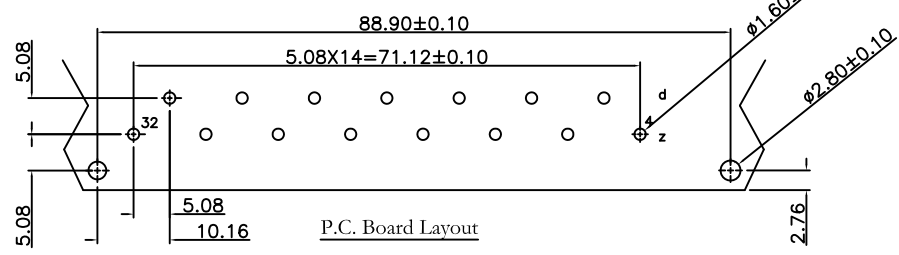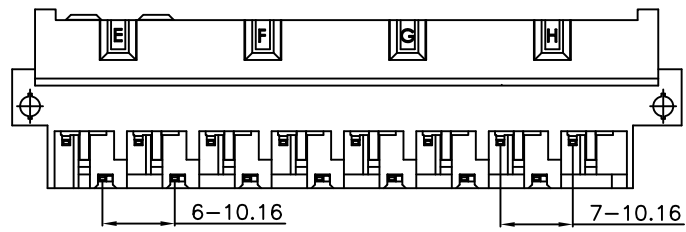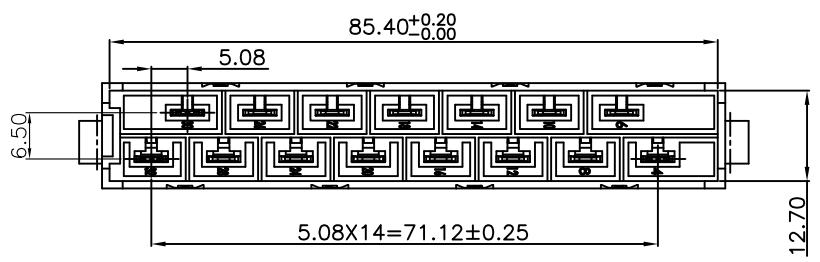

9001- 51 15 6 A A
 Series | 1: Male | Position | 6: Z28 & Z32 Premating 1.65mm
 A: Tray Package
 A: Ag/Ni Plating
 T: Tin/Ni Plating

CONTACT NO.	L
z4,z8,z12,z16,z20,z24	6.00
z28,z32	7.65
d6,d10,d14,d18,d22,d26,d30	6.00

Tolerances	Dwg No.	9001D51015	Title:
x = ± 0.5	Projection		9001 Series DIN41612 H15 Type Male
.x = ± 0.25	Unit	mm	
.xx = ± 0.15	Scale	1:1	
	Drawn By	LX 06/17'14	

OUPIN			
OUPIN ELECTRONIC(KUNSHAN) CO., LTD.			
P/N: 9001-51156xA			
SHEET	1/1	Ver. No.	R4