
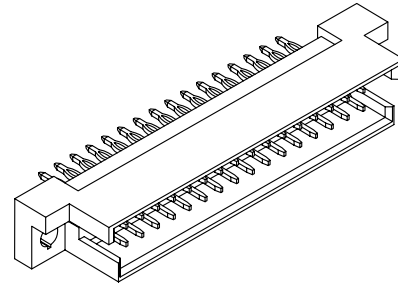


REV.	SPECIFICATION	ECN NO.	APPD.
A2		12/02'06	

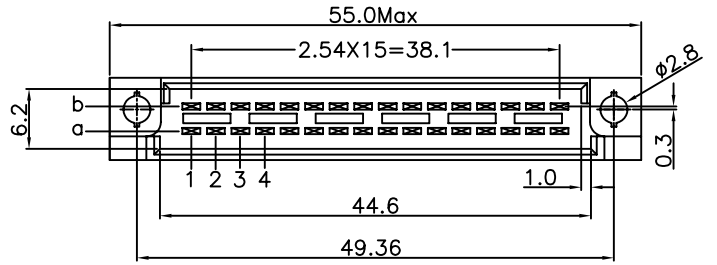





**Material:**

Housing: 30% Glass filled PBT UL94V-0.  
Contacts: Brass.

**Electrical Characteristics:**

Current Rating: 2 AMP.  
Dielectric Withstanding Voltage: AC 1000V For 1 minute.  
Insulator Resistance: 1000MΩ min. at DC 500V.  
Contact Resistance: 30mΩ max. at DC 100mA.  
Operating Temperature: -55°C~+105°C

**\*RoHS Compliant**

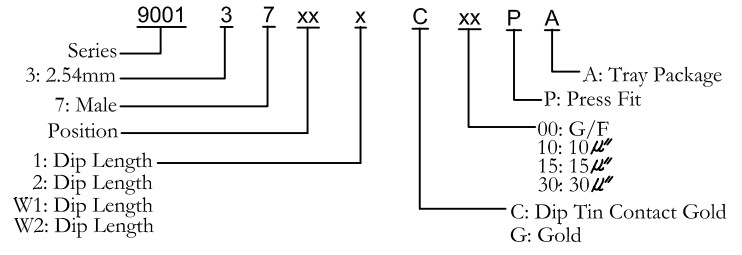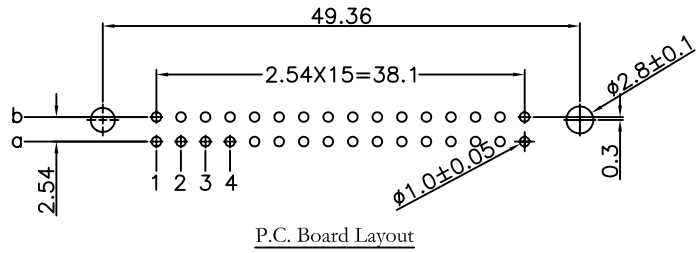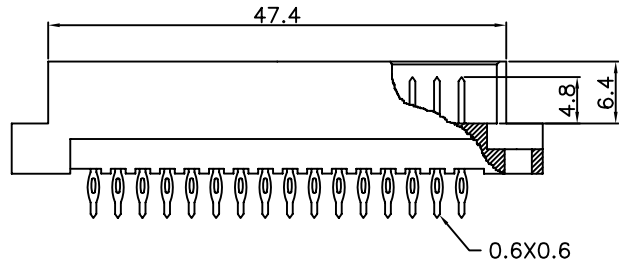

X length	1	2	W1	W2
		4.6	6.3	13

Pitch	Position	Rows with Contacts	Contact Arrange	P/N
2.54mm	32	a b		9001-3732xCxxPA
	16	a -		9001-3716xCxxPA

<b>Tolerances</b>	<b>Drawn No.</b>	9001D37002		<b>Title:</b>	9001 Series	
x = ±0.5	<b>Projection</b>			DIN41612 Half Q Type		
.x = ±0.25	<b>Unit</b>	mm	<b>Scale</b>	Press Fit		
.xx = ±0.15	<b>Drawn By</b>	Lixiaojun				

OUPIIN ELECTRONIC(KUNSHAN) CO., LTD.			
P/N: 9001-37xxx CxxPA			
<b>SHEET</b>	1/1	<b>Ver.No.</b>	A2