
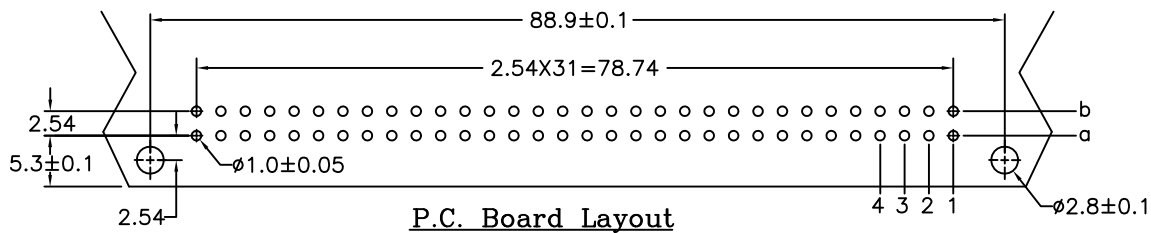
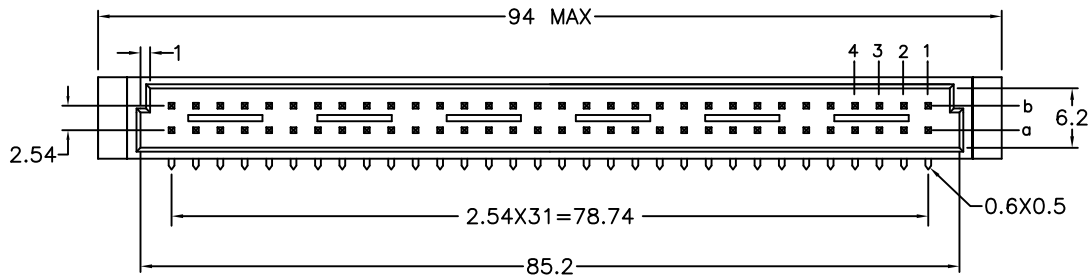



REV.	SPECIFICATION	ECN NO.	APPD.
R1		ECN161201	

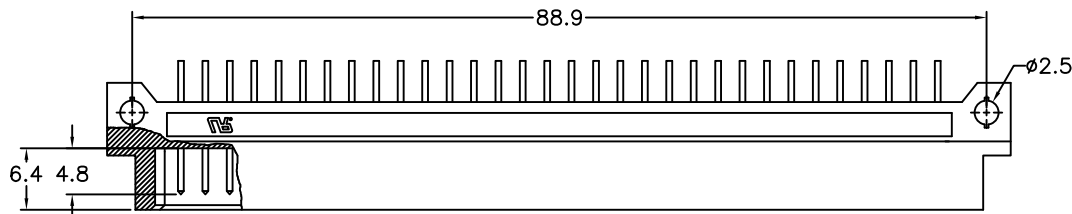

Material:

Housing: High Temperature Plastic UL94V-0.
Contacts: Brass.

Electrical Characteristics:

Current Rating: 2 AMP.
Dielectric Withstanding Voltage: AC 1000V For 1 minute.
Insulator Resistance: 1000MΩmin. at DC 500V.
Contact Resistance: 30mΩmax. at DC 100mA.
Operating Temperature: -55°C ~ +105°C.

(A2)

***RoHS Compliant**

9001- 3 1 64 1 C 00 A -HT
Series 3: 2.54mm 1: Male Position 1: Dip Length C: Dip Tin Contact Gold 00: G/F A: Tray HT: High Temperature Housing
10: 10μ" Package
15: 15μ"
30: 30μ"

Pitch	Position	Rows with Contacts	Contact Arrange
2.54mm	64	a b	
	32	a -	

Tolerances	Dwg No.	9001D31020	Title:
x = ±0.5	Projection		9001 Series
.x = ±0.25	Unit mm	Scale 1:1	DIN41612 B Type Male
.xx = ±0.15	Drawn By	ycj 12/01'16	

OUPIN			
OUPIN ELECTRONIC(KUNSHAN) CO., LTD.			
P/N: 9001-31XX1CxxA-HT			
SHEET	1/1	Ver.No.	R1