

REV.	SPECIFICATION	ECN NO.	APPD.
R3		ECN140536	







**Material:**

Housing: Thermoplastic Polyester Glass Filled UL94V-0.  
 Contacts: Copper Alloy.

**Electrical Characteristics:**

Current Rating: 15 AMP.  
 Dielectric Withstanding Voltage: AC 3100V For 1 minute.  
 Insulator Resistance: 1000MΩ min. at DC 500V.  
 Contact Resistance: 8mΩ max. at DC 100mA.  
 Operating Temperature: -55°C ~+125°C .

**\*RoHS Compliant**

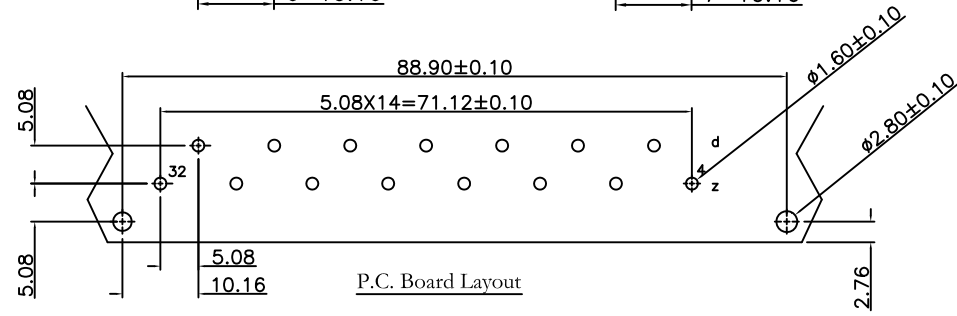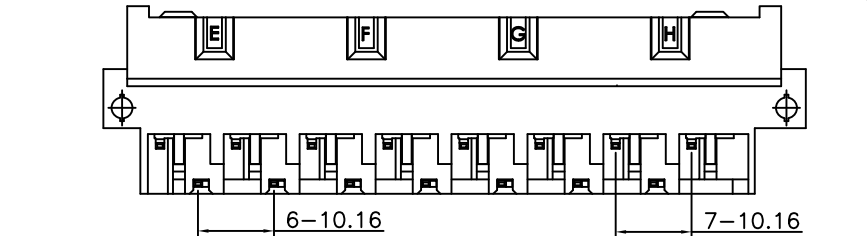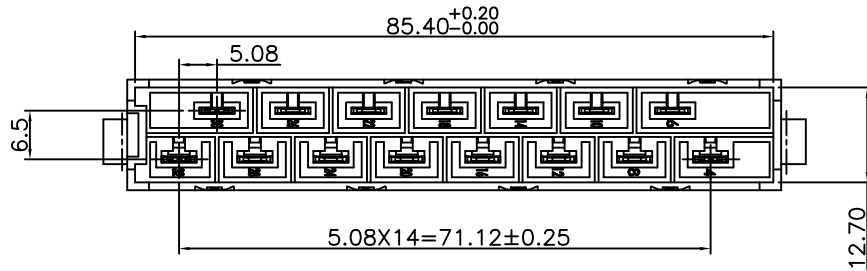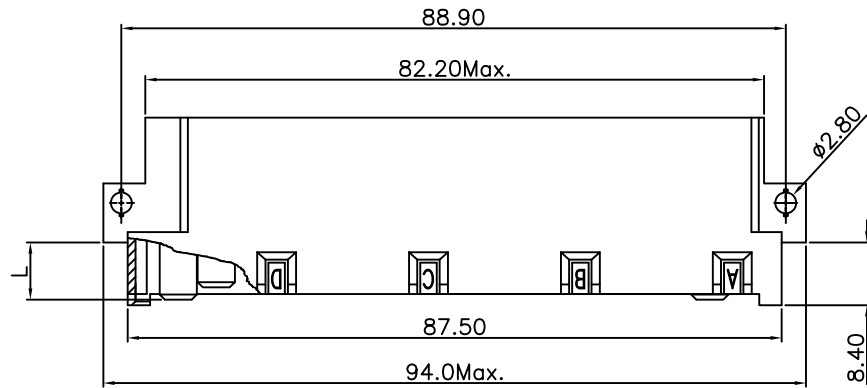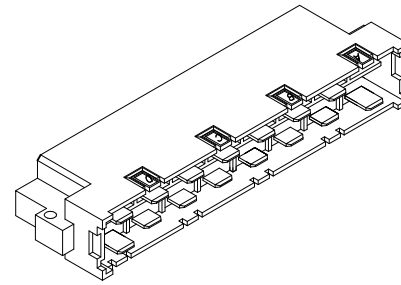

9001- 51 15 2 x A  
 Series ———  
 1: Male ———  
 Position ———  
 A: Tray Package  
 A: AG/Ni Plating  
 T: TIN/Ni Plating  
 2: Z4,Z32 Premating 1.65mm

CONTACT NO.	L
z8,z12,z16,z20,z24,z28	6.00
z4,z32	7.65
d6,d10,d14,d18,d22,d26,d30	6.00

Tolerances	Dwg No.	9001D51005
x = ±0.5	Projection	
.x = ±0.25	Unit	mm
.xx = ±0.15	Scale	1:1
	Drawn By	LX 06/17/14

Title:  
 9001 Series  
 DIN41612 H15 Type Male

<b>OUPIN</b>			
OUPIN ELECTRONIC(KUNSHAN) CO., LTD.			
P/N: 9001-51152xA			
SHEET	1/1	Ver.No.	R3