
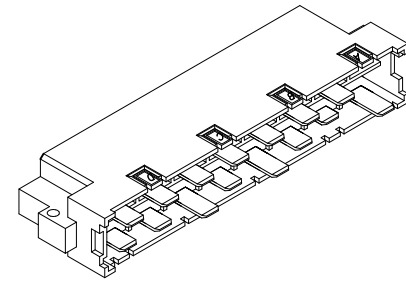


REV.	SPECIFICATION	ECN NO.	APPD.
R4		ECN140535	

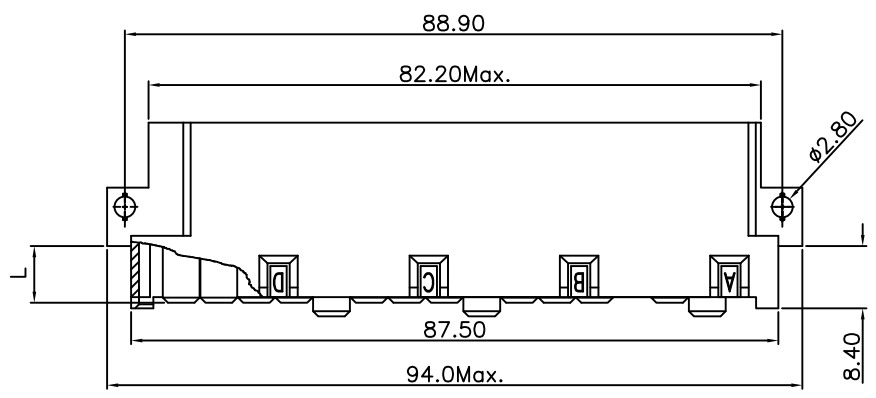





Material:

Housing: Thermoplastic Polyester Glass Filled UL94V-0.
 Contacts: Copper Alloy.

Electrical Characteristics:

Current Rating: 15 AMP.
 Dielectric Withstanding Voltage: AC 3100V For 1 minute.
 Insulator Resistance: 1000M Ω min. at DC 500V.
 Contact Resistance: 8m Ω max. at DC 100mA.
 Operating Temperature: -55 $^{\circ}$ C ~ +125 $^{\circ}$ C .

***RoHS Compliant**

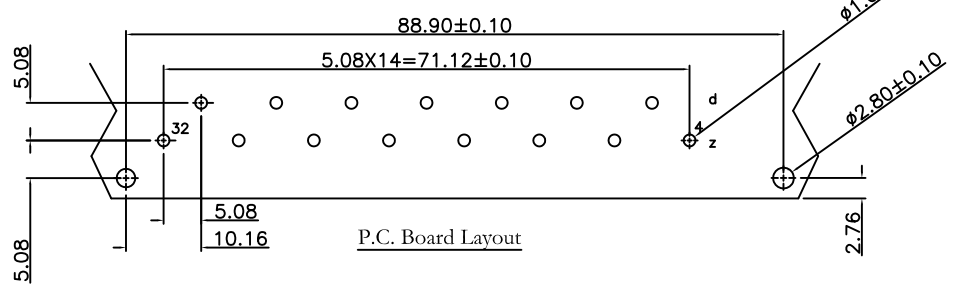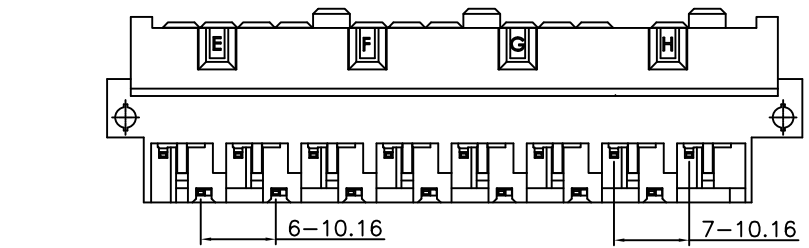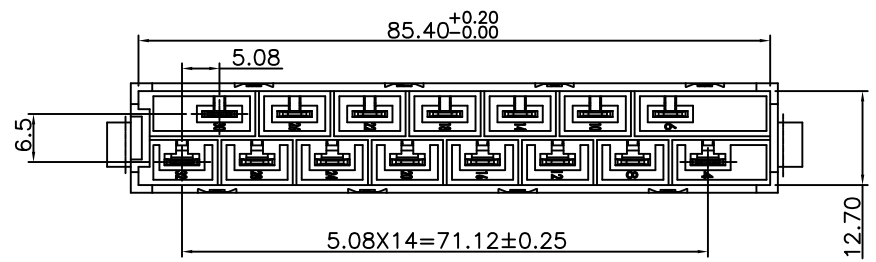

9001- 51 15 5 x A
 Series ——— 51 ——— 15 ——— 5 ——— x ——— A ———
 1: Male ———
 Position ———
 A: Tray Package
 A: AG/Ni Plating
 T: TIN/Ni Plating
 5: Z8 Normal
 Z4,Z16,Z24 Premating 3.50mm
 Other Pins Premating 1.65mm

CONTACT NO.	L
z8	6.00
z12,z20,z28,z32	7.65
z4,z16,z24	9.50
d6,d10,d14,d18,d22,d26,d30	7.65

Tolerances	Dwg No.	9001D51004
x = ± 0.5	Projection	
.x = ± 0.25	Unit	mm
.xx = ± 0.15	Scale	1:1
	Drawn By	LX 06/23'14

Title:
 9001 Series
 DIN41612 H15 Type Male

OUPIN			
OUPIN ELECTRONIC(KUNSHAN) CO., LTD.			
P/N: 9001-51155xA			
SHEET	1/1	Ver.No.	R4