
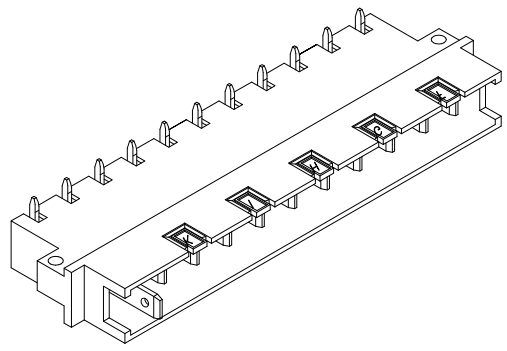






REV.	SPECIFICATION	ECN NO.	APPD.
R1			

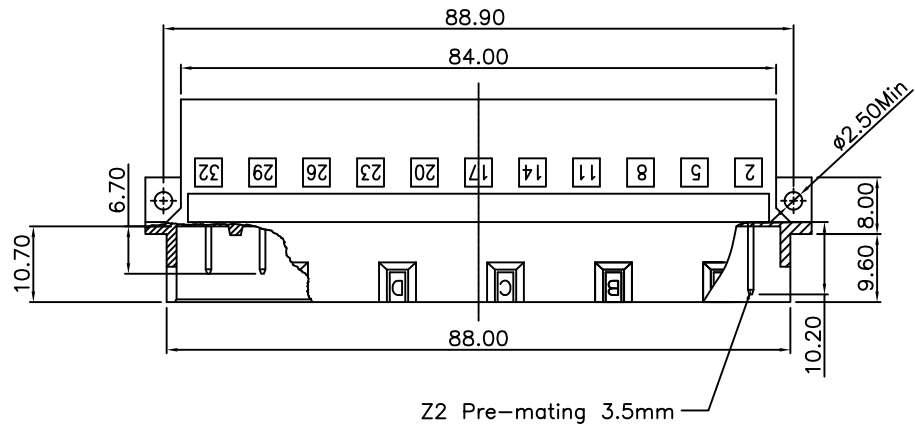

Material:
Housing: Thermoplastic Polyester Glass Filled UL94V-0.
Contacts: Copper Alloy.

Electrical Characteristics:
Current Rating: 15AMP.
Dielectric Withstanding Voltage: AC3100V For 1 minute.
Insulator Resistance: 1000M Ω min. at DC 500V.
Contact Resistance: 8m Ω max. at DC 100mA.
Operating Temperature: -55°C ~ +125°C .

***RoHS Compliant**

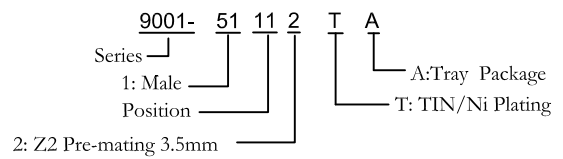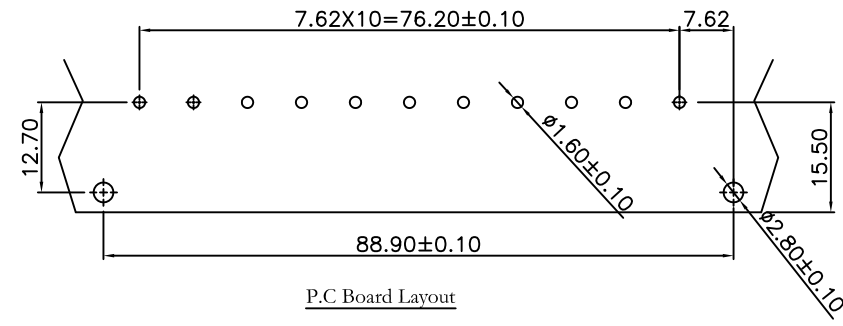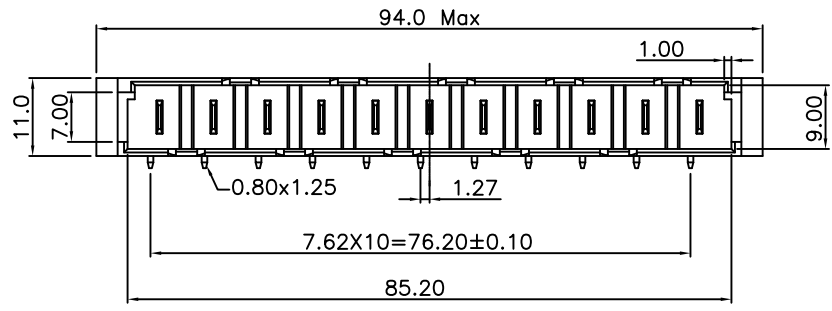

Tolerances x = ±0.5 .x = ±0.25 .xx = ±0.15	Drawn No.	9001D51033		Title: 9001 Series DIN41612 H11 Male Type	 OUPIIN ELECTRONIC(KUNSHAN) CO., LTD.				
	Projection								P/N: 9001-51112TA
	Unit	mm	Scale		1:1	SHEET	1/1	Ver.No.	
	Drawn By	ZJJ	06/14'11		Ⓢ				