REV.	SPECIFICATION	ECN NO.	APPD.
R5		ECN140535	

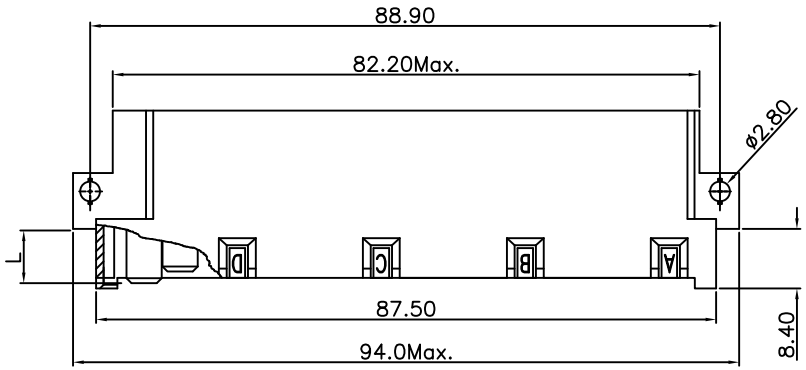

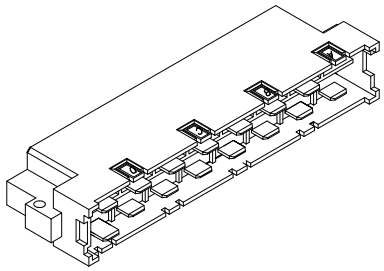

Material:

Housing: Thermoplastic Polyester Glass Filled UL94V-0.
Contacts: Copper Alloy.
Lock: Copper Alloy.

Electrical Characteristics:

Current Rating: 15 AMP.
Dielectric Withstanding Voltage: AC3100V For 1 minute.
Insulator Resistance: 1000MΩ min. at DC 500V.
Contact Resistance: 8mΩ max. at DC 100mA.
Operating Temperature: -55°C ~+125°C .

***RoHS Compliant**

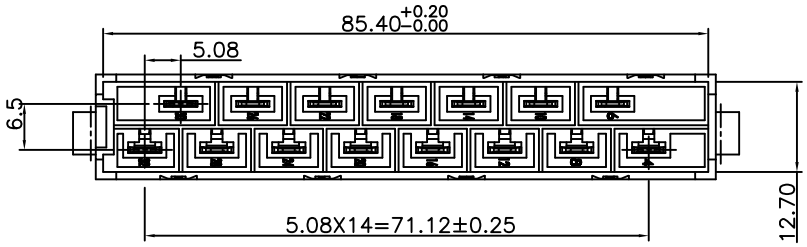



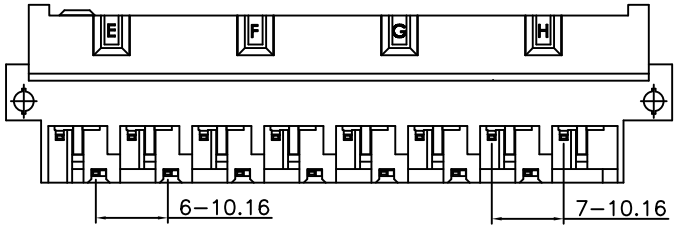

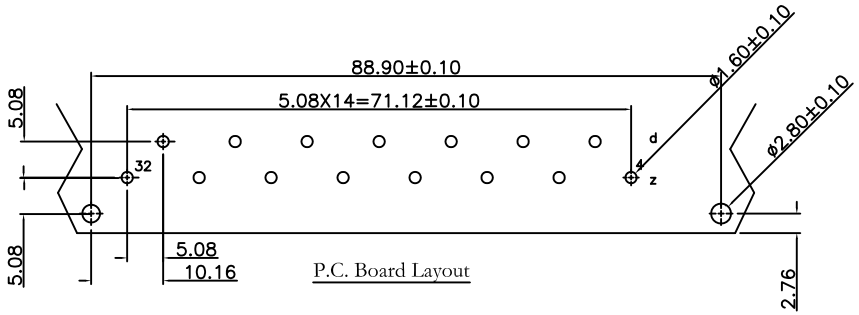

P.C. Board Layout

9001- 51 15 1 x L1 A

- Series
- 1: Male
- Position
- 1:Z32 Premating 1.65mm
- A: AG/Ni Plating
- T: TIN/Ni Plating
- L1:With Lock
- A:Tray Package

CONTACT NO.	L
z4,z8,z12,z16,z20,z24,z28	6.00
z32	7.65
d6,d10,d14,d18,d22,d26,d30	6.00

Tolerances	Dwg.No.	9001D51010	Title:	9001 Series DIN41612 H15 Type Male
x = ±0.5	Projection			
.x = ±0.25	Unit mm	Scale 1:1		
.xx = ±0.15	Drawn By	LX 06/17'14		

OUPIIN ELECTRONIC(KUNSHAN) CO., LTD.

P/N: 9001−51151xL1A

SHEET	1/1	Ver.No.	R5