
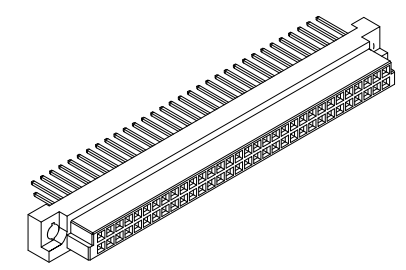





REV.	SPECIFICATION	ECN NO.	APPD.
R2		ECN181102	

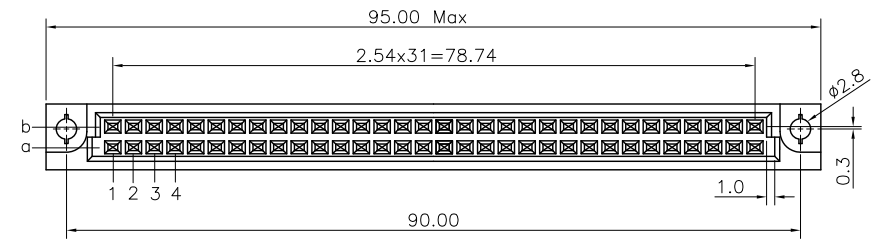

Material and Plating:
Housing: PBT,UL94V-0,Beige
Contacts: Copper Alloy.
Gold Plated on Contact Area and 80u" Min Tin or Gold Flash Plated on Press Fit over Nickel 50u" Min .

Electrical Characteristics:
Current Rating: 2 AMP.
Dielectric Withstanding Voltage: AC 1000V for 1minute.
Insulator Resistance: 1000MΩ min. at DC 500V.
Contact Resistance: 20mΩ max. at DC 100m A.
Operating Temperature: -55°C ~ +105°C .

*** RoHS Compliant**

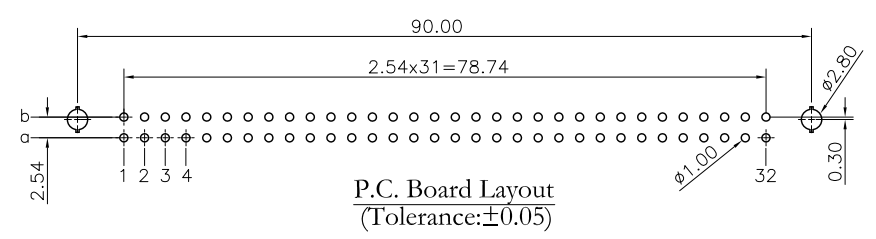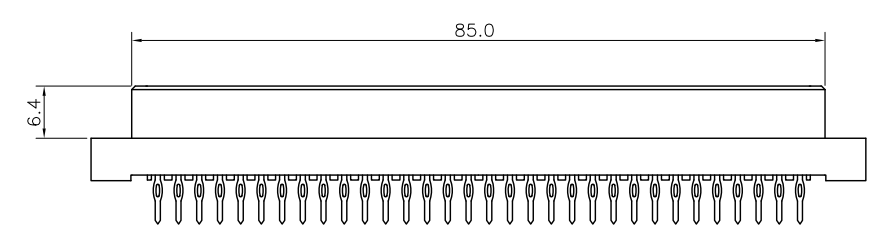

9001- 3 2 xx 1 C xx P A
Series
3: 2.54mm
2:Female
Position
1: Dip Length
2: Dip Length
W1: Dip Length
W2: Dip Length
C: Dip Tin
G: Gold Plated
A: Tray Package
P:Press Fit
00: G/F
10: 10u"
15: 15u"
30: 30u"

Pitch	Position	Rows with Contacts	Contact Arrange	X length			
				1	2	W1	W2
2.54mm	64	a b		4.6	6.3	13	17
	32	a -					

Tolerances	Dwg. No.	9001D32004	Title:	9001 Series DIN41612 B Type Female					
x = ±0.5	Projection		OUPIN OUPIN ELECTRONIC(KUNSHAN) CO., LTD. P/N: 9001-32xxxCxxPA						
.x = ±0.25	Unit	mm						Scale	1:1
.xx = ±0.15	Drawn By	DYQ						11/01'18	
SHEET		1/1	Ver.No.	R2					