
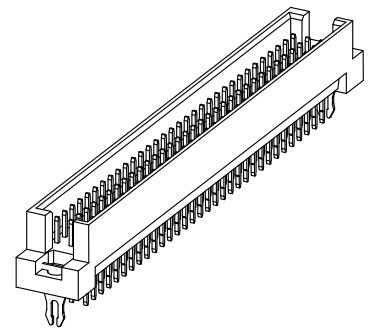







REV.	SPECIFICATION	ECN NO.	APPD.
R1			

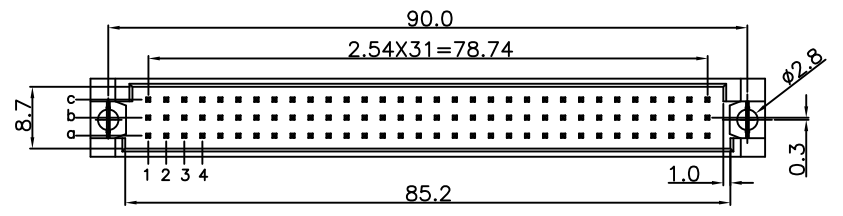

**Material:**  
Housing: Thermoplastic Polyester Glass Filled UL94V-0.  
Contacts: Copper Alloy.  
Lock: Copper Alloy.

**Electrical Characteristics:**  
Current Rating: 2 AMP.  
Dielectric Withstanding Voltage: AC 1000V For 1 minute.  
Insulator Resistance: 1000MΩ min. at DC 500V.  
Contact Resistance: 20mΩ max. at DC 100mA.  
Operating Temperature: -55°C~+125°C .

**\*RoHS Compliant**

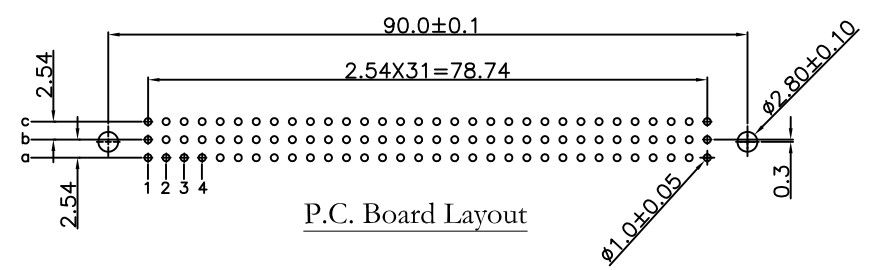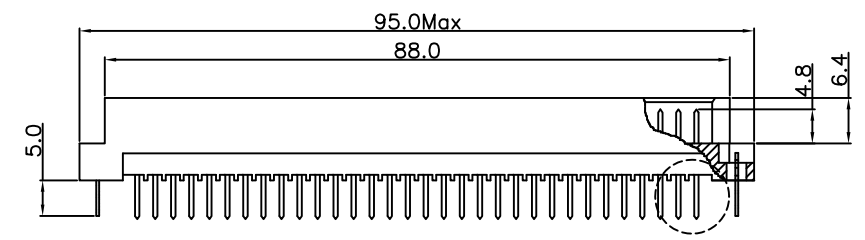

9001- 1 3 xx x C xx x L2 A  
Series  
1: 2.54mm  
3: Male  
Position  
1: Dip Length  
2: Dip Length  
W1: Dip Length  
W2: Dip Length  
C: Dip Tin  
Contact Gold  
G: Gold Plated  
Blank: W/O Lock  
L2: 8.9mm  
Blank: DiP  
P: Press Fit  
00: G/F  
10: 10 μ"  
15: 15 μ"  
30: 30 μ"  
A: Tray Package

Length	1	2	W1	W2
X	4.0	2.5	13	17
Y	4.6	6.3	13	17

Pitch	Position	Rows with Contacts	Contact Arrange	P/N
2.54mm	96	a b c		9001-1396xCxxPL2A
	64	a - c		9001-1364xCxxPL2A
	32	a - -		9001-1332xCxxPL2A

Tolerances	Dwg. No.	9001D13094
x = ±0.5	Projection	
.x = ±0.25	Unit	mm
.xx = ±0.15	Scale	1:1
	Drawn By	CG 11/28'12

Title:  
9001 Series  
DIN41612 R Type

**OUPIN**  
**OUPIN ELECTRONIC(KUNSHAN) CO., LTD.**  
P/N: 9001-13xxxCxxxL2A  
SHEET 1/1 Ver.No. R1