
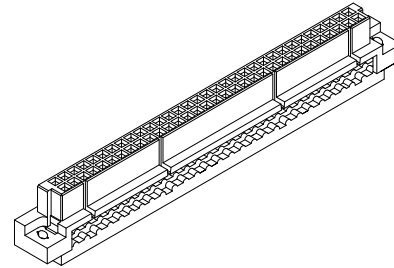


REV.	SPECIFICATION	ECN NO.	APPD.
R3	修正描述，統一規格	ECN170733	

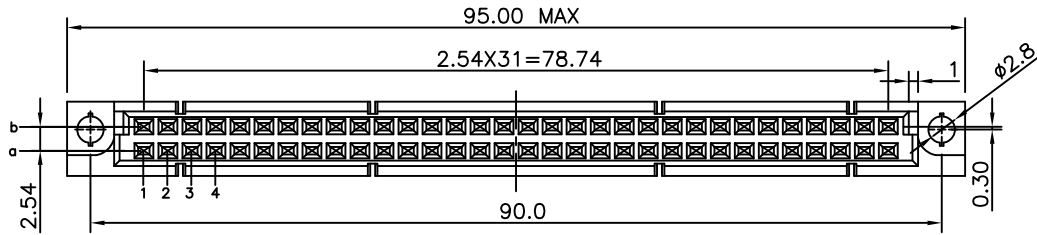

Material:

Housing: Thermoplastic Polyester Glass Filled UL94V-0.

Contacts: Phosphor Alloy.

Electrical Characteristics:

Current Rating: 2 AMP.




Dielectric Withstanding Voltage: AC 1000V For 1 minute.

Insulator Resistance: 1000M min. at DC 500V.

Ⓜ Contact Resistance: 20mΩmax. at DC 100mA.

Operating Temperature: -55°C ~+125°C .

***RoHS Compliant**

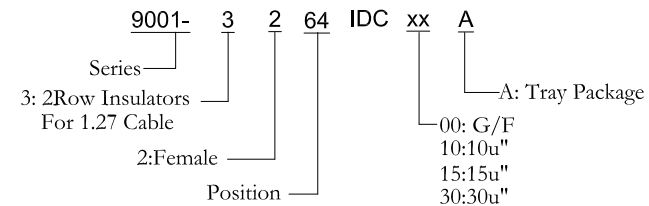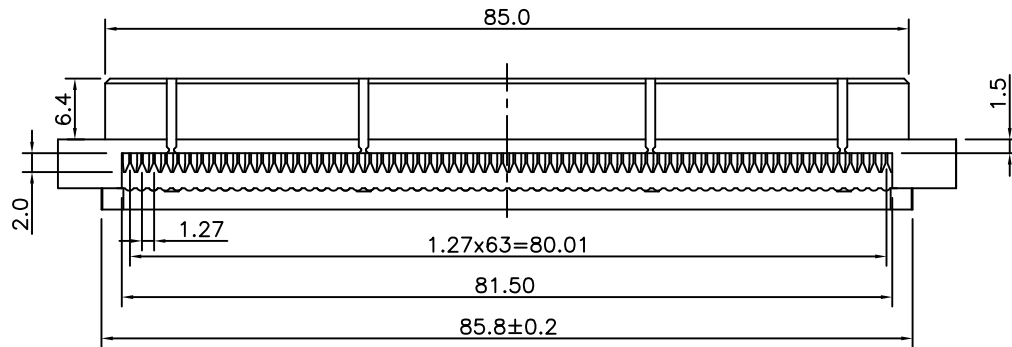

Tolerances	Dwg No.	9001D32005	Title:		OUPIN OUPIN ELECTRONIC(KUNSHAN) CO., LTD.
x = ±0.50	Projection		9001 Series DIN41612 IDC Type 2 Rows Female		
.x = ±0.25	Unit	mm			Scale
.xx = ±0.15	Drawn By	CCH7/24'17			SHEET
					1/1
					Ver.No.
					R3