
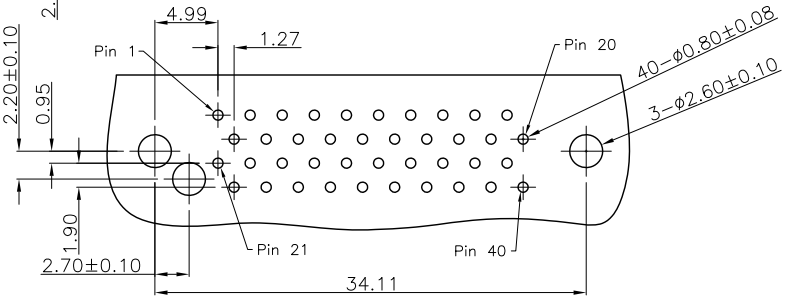
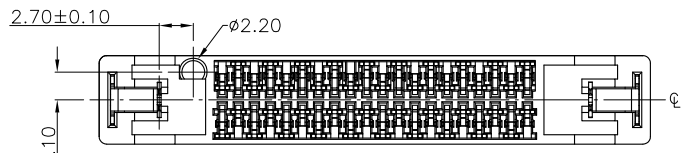
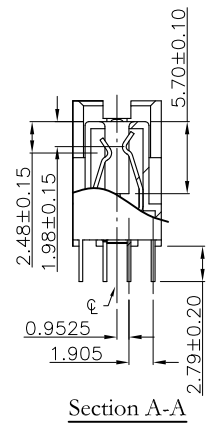

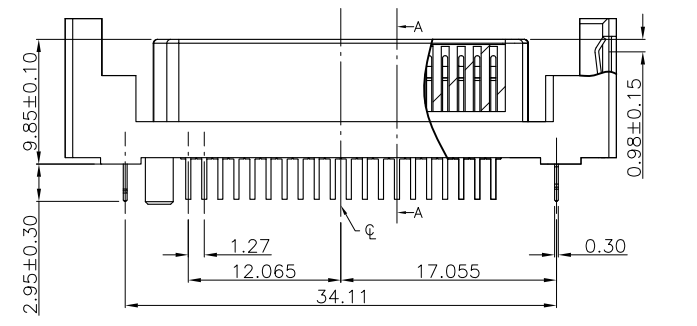
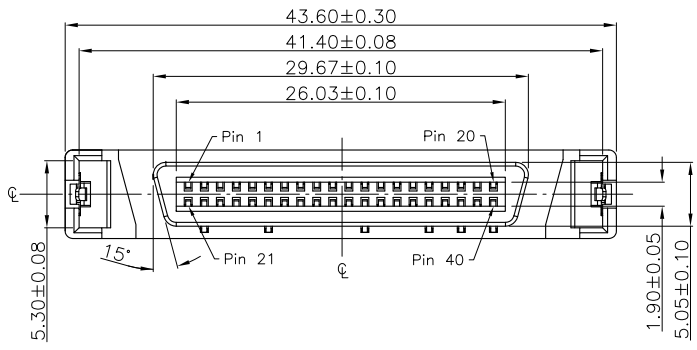


REV.	SPECIFICATION	ECN NO.	APPD.
R1		ECN190535	

Material and Plating:
Housing: LCP, UL94V-0, Black
Contacts: Phosphor Bronze
30u" Au+Pd/Ni on Contact Area and 80u" Min Tin Plated on Solder Tail over nickel 50u" Min .
Lock: Phosphor Bronze

Electrical Characteristics:
Current Rating: 1.0 AMP.
Dielectric Withstanding Voltage: AC 750V.
Insulation Resistance: 1000MΩ min. at DC 500V.
Contact Resistance: 15mΩ max.
Operating Temperature: -55°C~+105°C.

***RoHS Compliant**
Note1: Pin 1 THRU 20, 24, 25, 27, 28, 30, 31, 33, 34 is short terminals.
Pin 21, 22, 23, 26, 29, 32, 35 THRU 40 is long terminals.



Recommended PCB Layout

Series: 7229-
2: Female Straight
Double Row
Position Per Row: 2 X 20
B: Contact Au+Pd/Ni, Dip Tin Plated
7: 30μ"
S: Solder Straight Type
P: With Post
1: Dip Length 2.79mm
L: With lock
A: Tray Package

Tolerances	Dwg No.	7229-D0000-002	Title:
x = ±0.50	Projection		7229 Series
.x = ±0.25	Unit	mm	SCSI Female Straight Type
.xx = ±0.15	Drawn By	CXP 03/28'19	

7229 Series
SCSI Female Straight Type

OUPIN			
OUPIN ELECTRONIC(KUNSHAN) CO., LTD.			
P/N: 7229-22X20B7SP1LA			
SHEET	1/1	Ver.No.	R1