

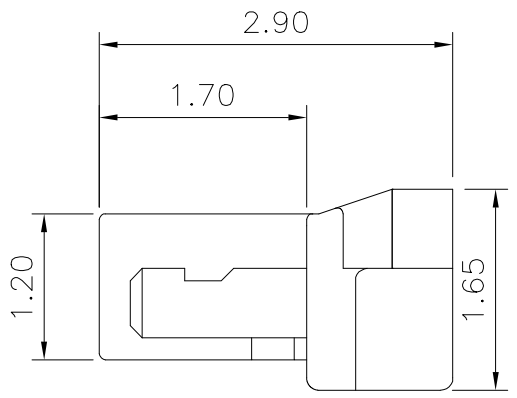
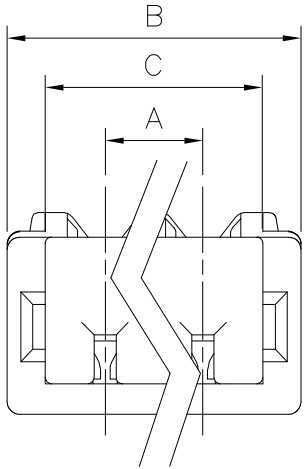


REV.	SPECIFICATION	ECN NO.	APPD.

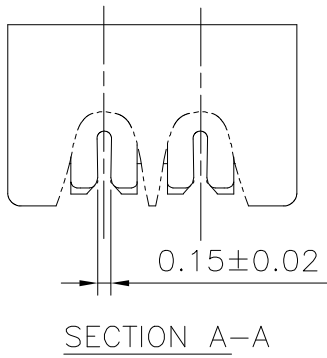

Material:
Housing: PA66, UL94V-0.
Contacts: Phosphor Bronze, Gold Plated over Nickel
 30 u" Min.
Recommend Wire: 32AWG.
Insulation O.D.: 0.38±0.02mm.
Electrical Characteristics:
Voltage Rating: AC 30V.
Current Rating: 0.5 AMP.(32AWG)
Dielectric Withstanding Voltage: AC 200V.
Insulation Resistance: 100MΩ min.
Contact Resistance: 20mΩ max.
Operating Temperature: -25°C~+85°C.
***RoHS Compliant**

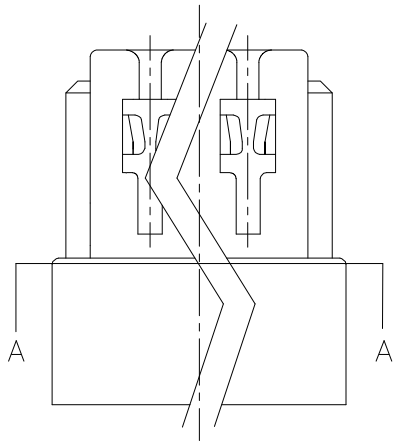

Positions	Dimension		
	A	B	C
02	0.80	2.40	1.78
03	1.60	3.20	2.58
04	2.40	4.00	3.38
05	3.20	4.80	4.18
06	4.00	5.60	4.98
07	4.80	6.40	5.78
08	5.60	7.20	6.58
09	6.40	8.00	7.38
10	7.20	8.80	8.18
11	8.00	9.60	8.98
12	8.80	10.40	9.78
13	9.60	11.20	10.58
14	10.40	12.00	11.38
15	11.20	12.80	12.18
16	12.00	13.60	12.98
17	12.80	14.40	13.78
18	13.60	15.20	14.58
19	14.40	16.00	15.38
20	15.20	16.80	16.18

Series 4876-xx HB
 No. of Position xx
 H: Housing B: Bulk Package

Tolerances	Dwg. No.	4876H02001	Title:	
.x = ±0.35	Projection	⊕ ⊖	4876 Series	
.xx = ±0.25	Unit	mm	0.8mm Housing	
.xxx = ±0.15	Scale	1:1	With preloaded Terminal	
	Drawn By	Martin 01/17'22	① 704	

OUPIN			
OUPIN ELECTRONIC(KUNSHAN) CO., LTD.			
P/N: 4876-xxHB			
SHEET	1/1	Ver.No.	B2