

REV.	SPECIFICATION	ECN NO.	APPD.

Material:

Housing: Thermoplastic Ployester Glass Filled UL94V-0.

Contacts: Copper Alloy.

Cable: 1.00mm(0.039") pitch flat cable.

Electrical Characteristics:

Current Rating: 1 AMP.









Dielectric Withstanding Voltage: AC 500V.

Insulator Resistance: 1000MΩ min. at DC 500V.

Contact Resistance: 30mΩ max. at DC 100mA.

Operating Temperature: -40°C~+105°C.

***RoHS Compliant**

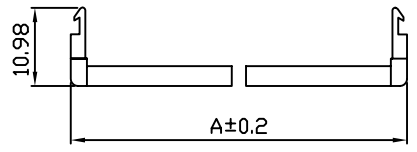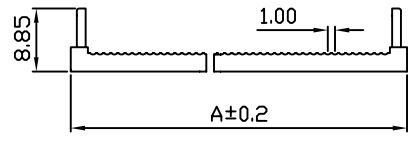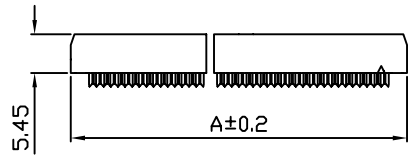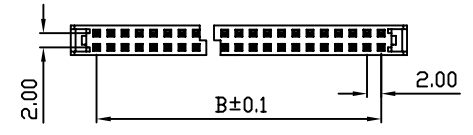

Position	Dimension	
	A	B
10	15.25	8.00
12	17.25	10.00
14	19.25	12.00
16	21.25	14.00
18	23.25	16.00
20	25.25	18.00
22	27.25	20.00
24	29.25	22.00
26	31.25	24.00
30	35.25	28.00
34	39.25	32.00
40	45.25	38.00
44	49.25	42.00
50	55.25	48.00

1101- xx C 00 B 1 A
 Series No. of Pin Count C: Selective Gold Plated 00: G/F 10: 10 μ" 15: 15 μ" 30: 30 μ" B: Black 1: With Strain Relief 2: Without Strain Relief A: Tray Package

Tolerances	Dwg. No.	1101D02001	Title:		 OUPIIN ELECTRONIC(KUNSHAN) CO., LTD. P/N: 1101-xxC00B1A SHEET 1/1 Ver.No. A7
x = ±0.5	Projection		1101 Series		
.x = ±0.30	Unit	mm	Scale	1:1	
.xx = ±0.20	Drawn By	Peggy06/18'13	I.D.C Socket 2.0mmX2.0mm		