


REV.	SPECIFICATION	ECN NO.	APPD.













Material:

Housing: Thermoplastic Polyester Glass Filled UL94V-0.
 Contacts: Copper Alloy.
 Cable: 1.27mm (0.050") pitch flat cable.

Electrical Characteristics:

Current Rating: 1 AMP.
 Dielectric Withstanding Voltage: AC 500V.
 Insulator Resistance: 3000MΩ min. at DC 500V.
 Contact Resistance: 30mΩ max. at DC 100mA.
 Operating Temperature: -40°C~+105°C.

***RoHS Compliant**

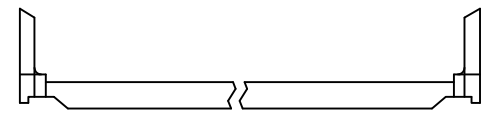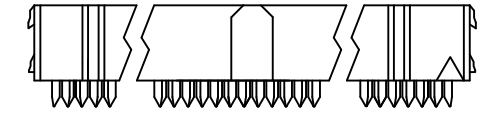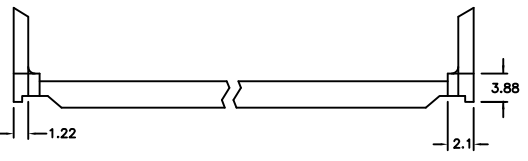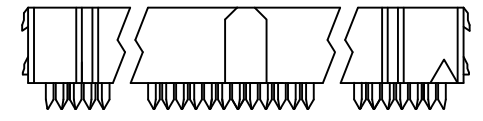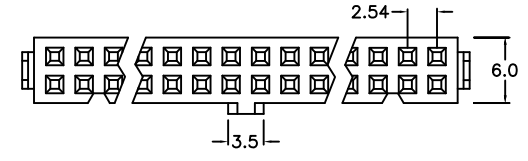

1001- Series xx No. of Pin Count C: Selective Gold Plated G: Gold Plated 00: G/F B: Black 1: With Strain Relief A: Tray Package 10: 10μ" 15: 15μ" 30: 30μ" Y: Grey

Position	Dimension	
	A	B
60	80.74	76.54
64	85.82	81.62

Tolerances	Dwg. No.	1001D02002	Title:		1001 Series I.D.C Socket 2.54mmX2.54mm	 OUPIIN ELECTRONIC(KUNSHAN) CO., LTD. P/N: 1001-60(64)C00B1A
x = ±0.5	Projection		Scale	1:1	SHEET 1/1 Ver.No. A8	
.x = ±0.25	Unit	mm	Drawn By	Peggy10/19'15		⑦18
.xx = ±0.15						