


REV.	SPECIFICATION	ECN NO.	APPD.

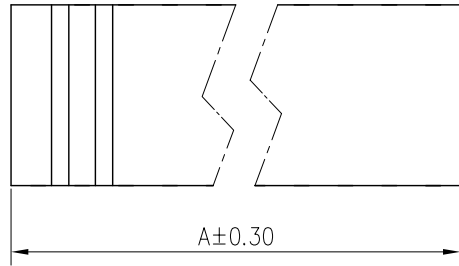

**Material:**

Housing: High Temperature Plastic UL94V-0.

Contacts: Copper Alloy.

**Electrical Characteristics:**

Current Rating: 1 AMP.




Dielectric Withstanding Voltage: AC 500V. for 1 minute.

Insulator Resistance: 1000MΩ min. at DC 500V.

Contact Resistance: 20mΩ max. at DC 100mA.

Operating Temperature: -40°C ~ +105°C .

**\*RoHS Compliant**

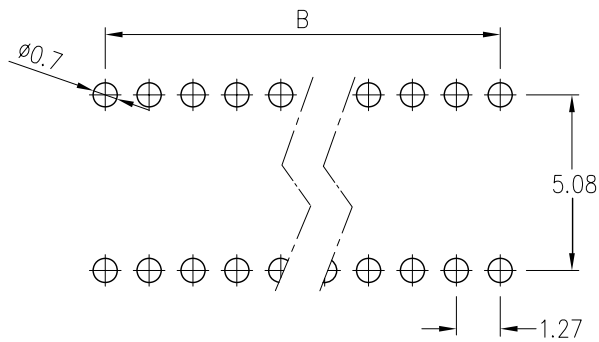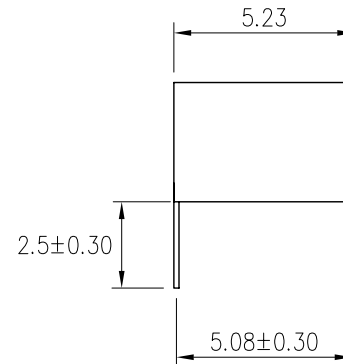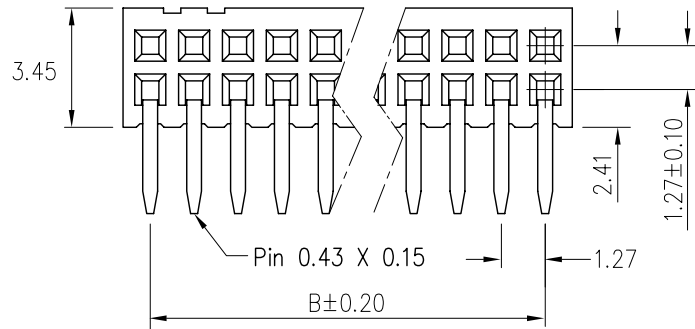

P.C. Board Layout

2249- 2 X xx G 00 S U  
 Series Double Row No. of Pin Per Row G: Gold Plated 00: G/F S: Dip Type U: Tube Package

Position	4 Thru 80
Dimension	
A	1.27 X No. of Positions/2 +0.3
B	1.27 X No. of Positions/2 -1.27

Tolerances	Dwg. No.	2249D02002	Title:
x = ±0.50	Projection		2249 Series
.x = ±0.25	Unit	mm	P.C.B. Socket 1.27mm
.xx = ±0.15	Scale	1:1	
	Drawn By	Peggy12/04/'13	719

OUPIIN ELECTRONIC(KUNSHAN) CO., LTD.			
P/N: 2249-2XxxG00SU			
SHEET	1/1	Ver.No.	A3