
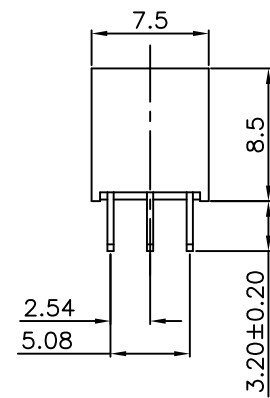
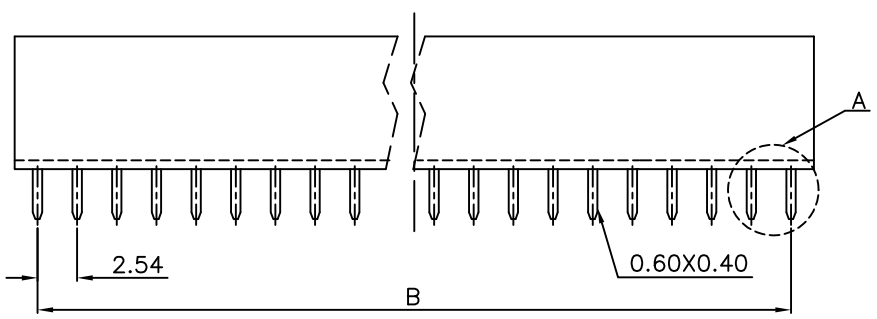



REV.	SPECIFICATION	ECN NO.	APPD.
R5		ECN160328	

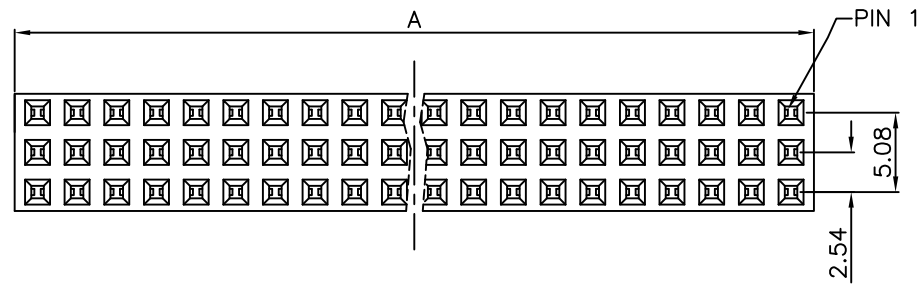

Material:

Housing: Thermoplastic Polyester Glass Filled UL94V-0

Contacts: Copper Alloy

Electrical Characteristics:

Current Rating: 2 AMP.

Dielectric Withstanding Voltage: AC 1000V for 1 minute.


Insulator Resistance: 1000MΩ min. at DC 500V.

Contact Resistance: 20mΩ max. at DC 100mA.


Operating Temperature: -55°C~+105°C .

***RoHS Compliant**

Insertion Depth: 2.55mm to 6.20mm.




Press Fit Type




Dip Type

Detail A

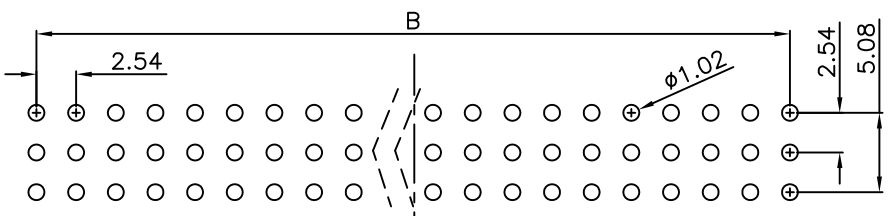

P.C. Board Layout
(Tolerance:±0.05)

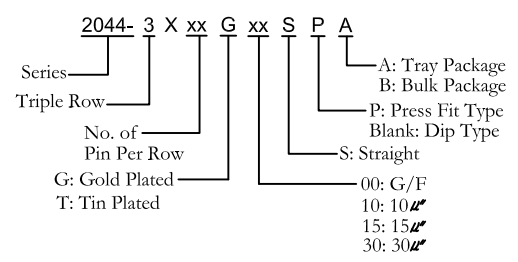

Position Dimension	6 Thru 120
A	2.54 X No. of Position /3+0.4
B	2.54 X No. of Position /3-2.54

Tolerances	Dwg. No.	2044-D0000-005
x = ±0.5	Projection	
.x = ±0.25	Unit	mm
.xx = ±0.15	Scale	1:1
	Drawn By	ycj 03/15'16

Title:
2044 Series
P.C.B. Socket
2.54mmX2.54mm(0.100"X0.100")

OUPIN
OUPIN ELECTRONIC(KUNSHAN) CO., LTD.
P/N: 2044-3XxxGxxSPA

SHEET	1/1	Ver. No.	R5
-------	-----	----------	----