
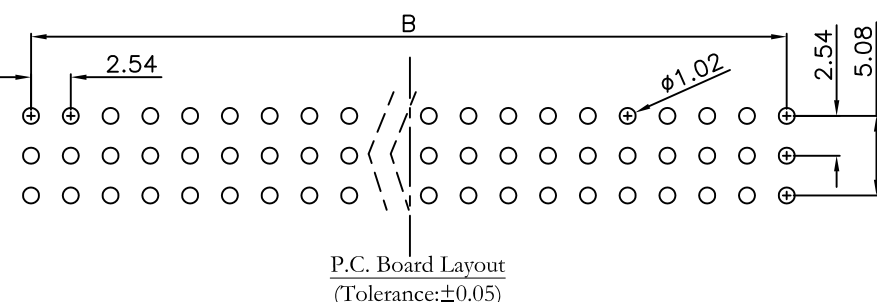
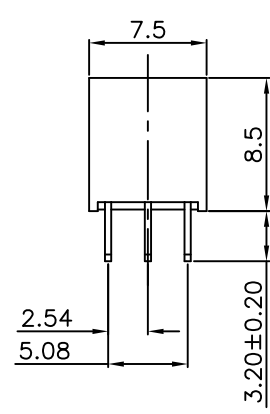
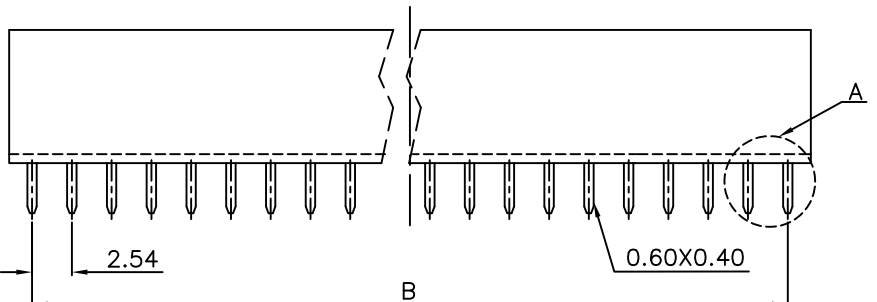



1 2 3 4 5 6 7 8 9 10 11 12

A B C D E F G H

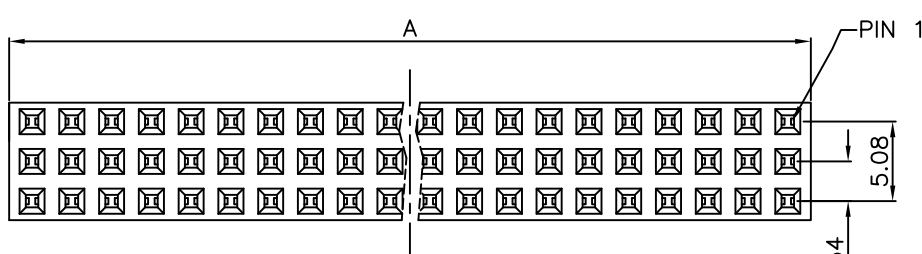

REV.	SPECIFICATION	ECN NO.	APPD.
R2		ECN160328	

Material:



Housing: High Temperature Plastic UL94V-0.(LCP Black)
 Contacts: Copper Alloy

Electrical Characteristics:

Current Rating: 2 AMP.
 Dielectric Withstanding Voltage: AC 1000V for 1 minute.
 Insulator Resistance: 1000MΩ min. at DC 500V.
 Contact Resistance: 20mΩ max. at DC 100mA.
 Operating Temperature: -55°C~+105°C .

***RoHS Compliant**


Insertion Depth: 2.55mm to 6.20mm.



Press Fit Type

Dip Type

Detail A

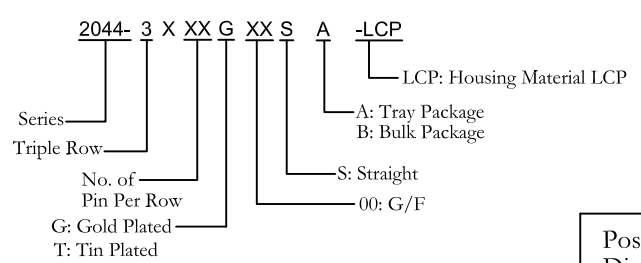

Position Dimension	6 Thru 120
A	2.54 X No. of Position /3+0.4
B	2.54 X No. of Position /3-2.54

Tolerances	Dwg. No.	2044-D0000-026	Title:
x = ±0.5	Projection		2044 Series
.x = ±0.25	Unit	mm	P.C.B. Socket
.xx = ±0.15	Scale	1:1	2.54mmX2.54mm(0.100"X0.100")
	Drawn By	ycj03/15'16	

OUPIN
OUPIN ELECTRONIC(KUNSHAN) CO., LTD.
 P/N: 2044-3XxxGxxSA-LCP
 SHEET 1/1 Ver.No. R2

1 2 3 4 5 6 7 8 9 10 11 12