
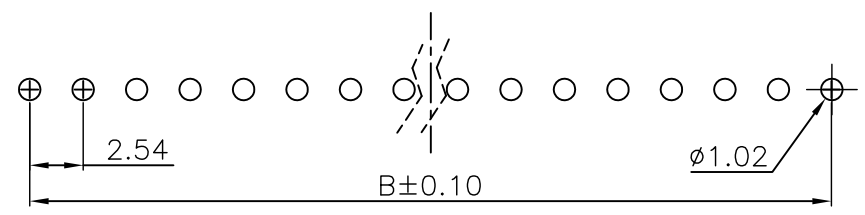

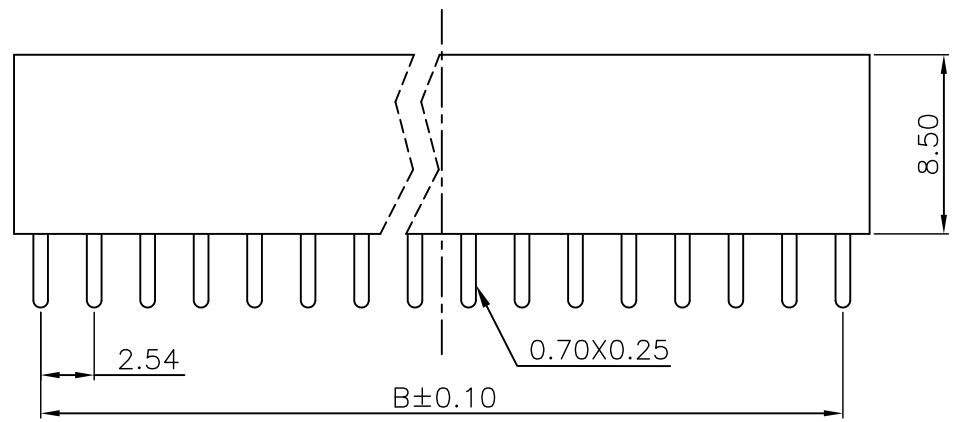



REV.	SPECIFICATION	ECN NO.	APPD.
R5		ECN151234	

Material:
Housing: Thermoplastic Polyester Glass Filled UL94V-0.
Contacts: Copper Alloy

Electrical Characteristics:
Current Rating: 2 AMP.
Dielectric Withstanding Voltage: AC 1000V For 1 minute.
Insulator Resistance: 1000MΩ min. at DC 500V.
Contact Resistance: 20mΩ max. at DC 100mA.
Operating Temperature: -55°C~+105°C .
***RoHS Compliant**
Insertion Depth: 2.50mm to 8.00mm.

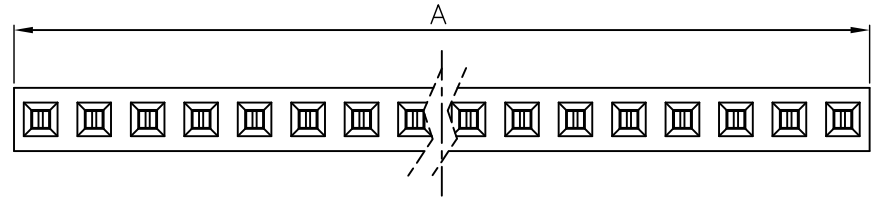

P.C. Board Layout
(Tolerance:±0.05)

2045- 1 X xx G xx S A
Series: 2045-
Single Row: 1
No. of Pin Per Row: xx
G: Gold Plated
T: Tin Plated
C: Selective Gold Plated
S: Straight
A: Tray Package
B: Bulk Package
00: G/F
10: 10 μ"
15: 15 μ"
30: 30 μ"

Position	2 Thru 40
Dimension	
A	2.54 X No. of Position
B	2.54 X No. of Position -2.54

Tolerances	Dwg. No.	2045-D0000-001
x = ±0.5	Projection	
.x = ±0.25	Unit	mm
.xx = ±0.15	Scale	1:1
	Drawn By	LQ 12/18'15

Title:
2045 Series
P.C.B. Socket 2.54mm
(0.100")

OUPIN
OUPIN ELECTRONIC(KUNSHAN) CO., LTD.
P/N: 2045-1XxxGxxSA

SHEET	1/1	Ver.No.	R5
-------	-----	---------	----