
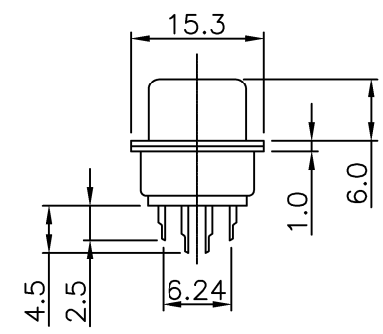
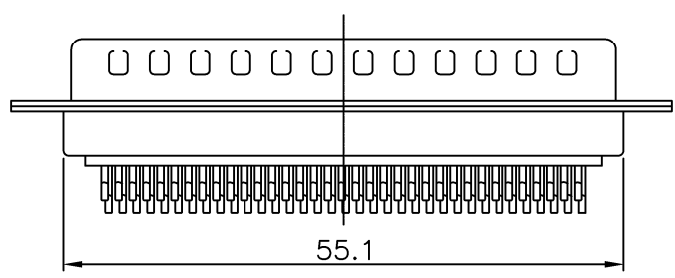
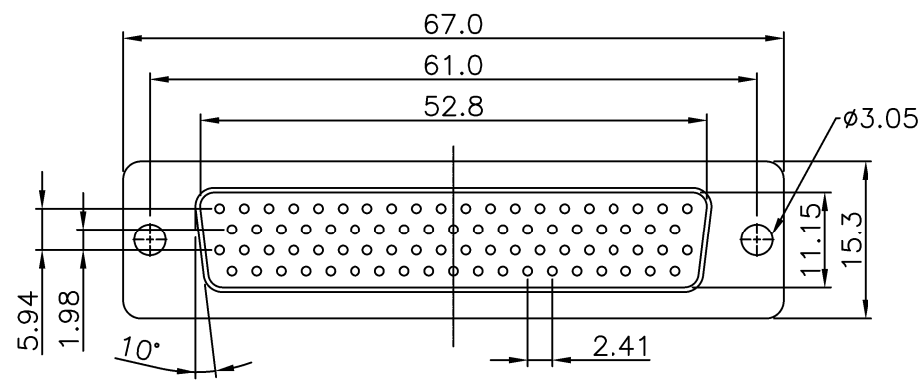


REV.	SPECIFICATION	ECN NO.	APPD.



**Material:**  
Housing: PBT, UL94V-0.  
Contacts: Brass, Gold Plated on Contact Area and 80~100u"  
Min Tin Plated on solder tail over Nickel 30u"  
or Gold Plated over Nickel 30 u".

Shell: Steel.

**Electrical Characteristics:**  
Current Rating: 1 AMP.  
Dielectric Withstanding Voltage: AC 1000V.  
Insulation Resistance: 1000MΩ min.  
Contact Resistance: 20mΩ max.  
Operating Temperature: -55°C~+105°C.  
**\*RoHS Compliant**



7917- 78 M T B C 00 A  
Series ———  
Position ———  
M: Male ———  
B: Black ———  
A: Tray Package  
00: Gold Flash  
C: Selective Gold Plated  
G: Gold Plated

Tolerances	Dwg. No.	7917D01001	Title:		 <b>OUPIIN ELECTRONIC(KUNSHAN) CO., LTD.</b> P/N: 7917-78MTBC00A SHEET 1/1 Ver.No. A7
x = ±0.5	Projection		7917 Series		
.x = ±0.25	Unit	mm	Scale	1:1	
.xx = ±0.15	Drawn By	Martin 11/08'22	H.D. D-SUB 78P Solder Cup Type		
			Φ767		