

REV.	SPECIFICATION	ECN NO.	APPD.
A3			





Material:

Housing: PBT, UL94V-0.
 Contacts: Brass, Gold Plated over Nickel 30u" Min.
 Shell: Steel.

Electrical Characteristics:

Current Rating: 5 AMP.
 Dielectric Withstanding Voltage: AC 1000V for 1 minute.
 Insulator Resistance: 1000MΩ min, at DC 500V.
 Contact Resistance: 20mΩ max, at DC 100mA.
 Operating Temperature: -55°C~+105°C.

***RoHS Compliant**

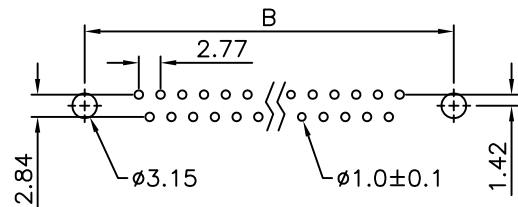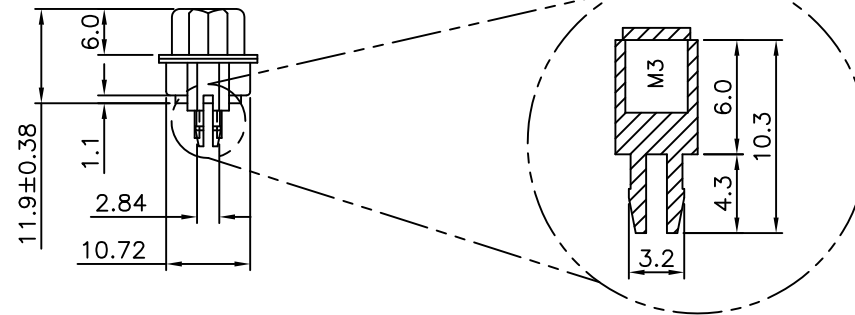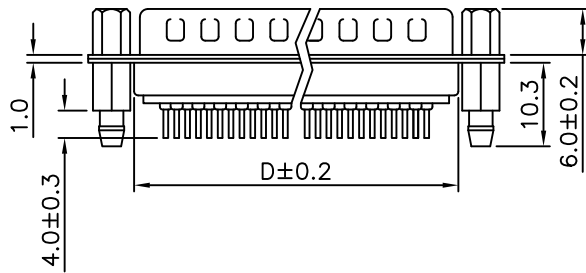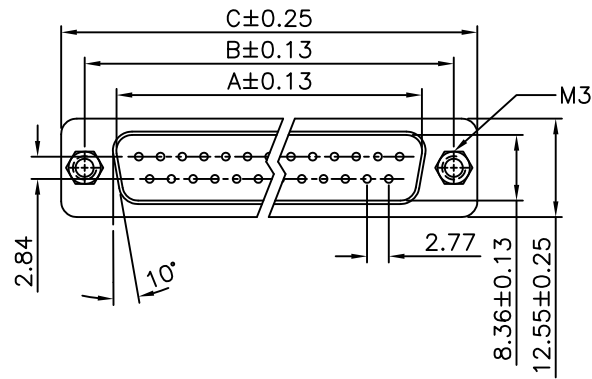

P.C. Board Layout

7905- xx M T B G 00 N3N6 N5 A -6MM -M3
 Series ———
 Position ———
 M: Male ———
 B: Black ———
 U: Blue ———
 W: White ———
 G: Gold Plated ———
 00:G/F ———
 N3N6: With Threaded Riveted Brackets and Jack Screws Assembled
 N5: Machine Pin
 A: Tray Package
 -6MM: Height of Jack Screw
 -M3: M3 Threaded Hole

Position	Dimension			
	A	B	C	D
9	16.92	24.99	30.81	19.28
15	25.25	33.32	39.14	27.51
25	38.96	47.04	53.04	41.30
37	55.42	63.50	69.32	57.71

Tolerances	Dwg. No.	7905D01013	
x = ±0.50	Projection	⊕ ↗	
.x = ±0.25	Unit	mm	Scale 1:1
.xx = ±0.15	Drawn By	jia-chi 01/02'18	

Title:
 7905 Series
 D-SUB Straight Type
 767

OUPIN			
OUPIN ELECTRONIC(KUNSHAN) CO., LTD.			
P/N: 7905-xxMTBG00N3N6N5A-6MM-M3			
SHEET	1/1	Ver.No.	A7