


REV.	SPECIFICATION	ECN NO.	APPD.

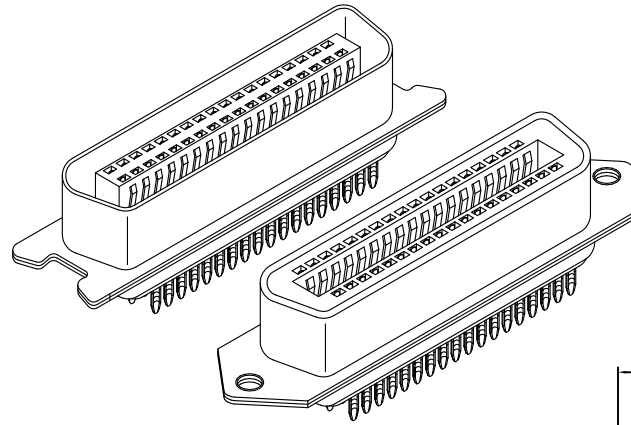

Material:

Housing: Thermoplastic Polyester Glass Filled UL94V-0.

Contacts: Copper Alloy.

Shell: Cold Roller Steel.

Electrical Characteristics:

Current Rating: 5 AMP.







Dielectric Withstanding Voltage: AC 1000V For 1 minute.

Insulator Resistance: 1000MΩ min. at DC 500V.

Contact Resistance: 30mΩ max. at DC 100mA.

Operating Temperature: -55°C~+105°C.


***RoHS Compliant**

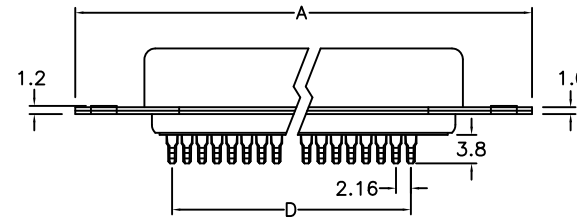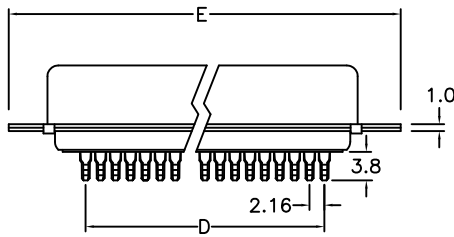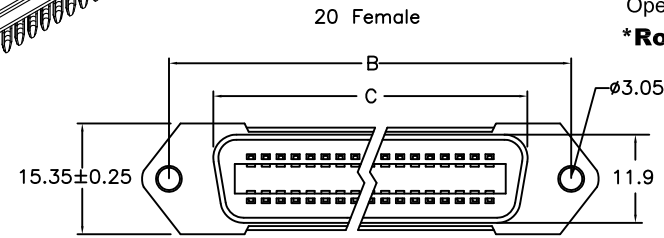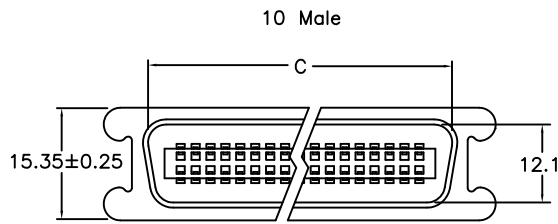

Ordering information

5974-	10	xx0	A
Series	10: Male 20: Female	140: 14 Pin 240: 24 Pin 360: 36 Pin 500: 50 Pin	A: Tray Package

Position	A	B	C		D	E
			10 Male	20 Female		
14	43.9	36.0	/	25.2	12.96	/
24	54.7	46.8	/	36.0	23.76	/
36	67.7	59.7	49.3	48.9	36.72	62.1
50	82.8	74.9	64.4	64.1	51.84	77.4

Tolerances	Drawn No.	5974D03001		Title:	5974 Series Centronic Connector Solder Type	
x = ±0.5	Projection	⊕ ⊖		522	 OUPIIN ELECTRONIC(KUNSHAN) CO., LTD. P/N: 5974-10xxOA&5974-20xxOA	
.x = ±0.30	Unit	mm	Scale			
.xx = ±0.20	Drawn By	Rikey 01/25'10				

SHEET	1/1	Ver.No.	A7
-------	-----	---------	----