

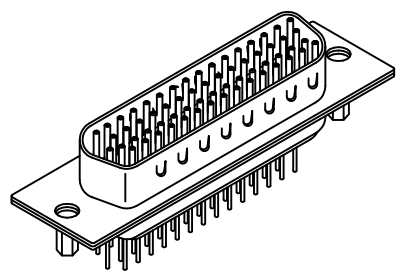
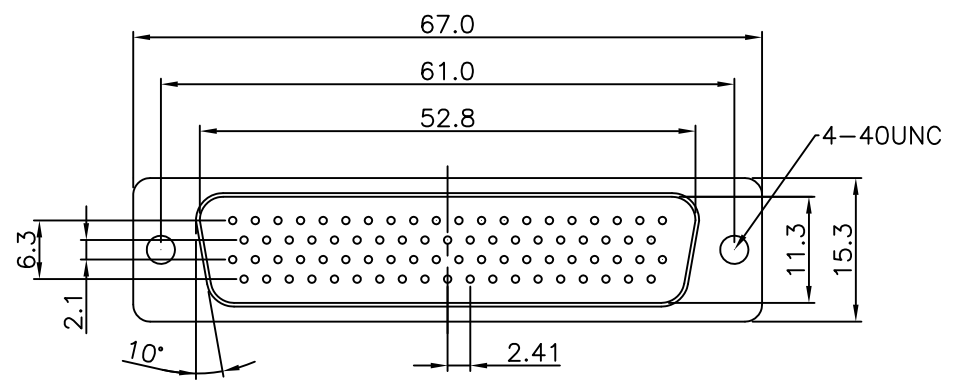
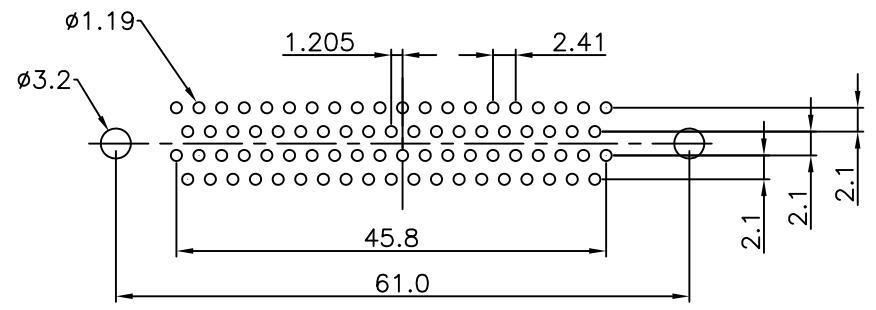


REV.	SPECIFICATION	ECN NO.	APPD.

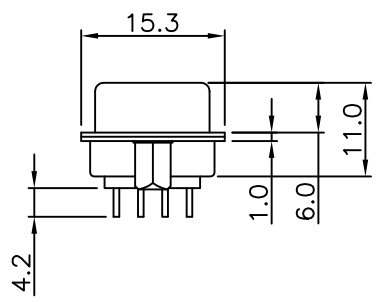

**Material:**  
Housing: PBT, UL94V-0.  
Contacts: Brass, Gold Plated on Contact Area and 80~100u"  
Min Tin Plated on solder tail over Nickel 30u" Min  
or Gold Plated over Nickel 30 u" Min.  
Shell: Steel.

**Electrical Characteristics:**  
Current Rating: 1 AMP.  
Dielectric Withstanding Voltage: AC 1000V For 1 minute.  
Insulation Resistance: 1000MΩ min. at DC 500V.  
Contact Resistance: 20mΩ max. at DC 100mA.  
Operating Temperature: -55°C~+105°C.  
**\*RoHS Compliant**

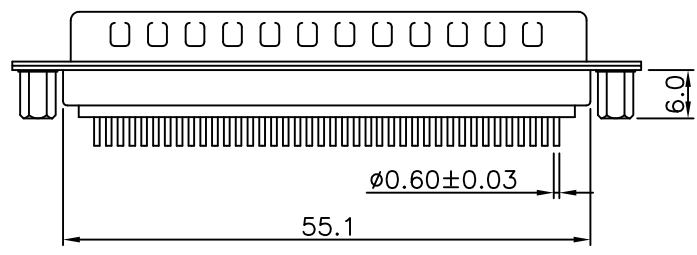

P.C. Board Layout

7915- 78 M T B C 15 N2 A -6MM

Series ————  
Position ————  
M: Male ————  
B: Black ————  
U: Blue ————  
W: White ————  
G: Gold Plated ————

15: 15U"  
N2: With NUTS 4-40UNC  
A: Tray Package  
Height of Jack Screw  
Threaded Riveted  
On Rear Side

00: G/F

Tolerances	Dwg. No.	7915D01005	Title:		7915 Series H.D. D-SUB Straight Type	 <b>OUPIIN ELECTRONIC(KUNSHAN) CO., LTD.</b> P/N: 7915-78MTBC15N2A-6MM			
x = ±0.50	Projection		Scale						
.x = ±0.25	Unit	mm	Scale						
.xx = ±0.15	Drawn By	Lucas 12/25'17	Scale						