


REV.	SPECIFICATION	ECN NO.	APPD.

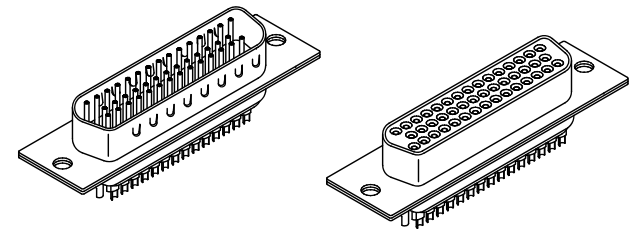


Material:
Housing: PBT, UL94V-0.
Contacts: Brass, Gold Plated on Contact Area and 80~100 μ" Tin Plated on Solder Tail over Nickel 30 μ" Min.
Shell: Steel.





Electrical Characteristics:
Current Rating: 1 AMP.
Dielectric Withstanding Voltage: AC 1000V For 1 minute.
Insulation Resistance: 1000MΩ min.at DC 500V.
Contact Resistance: 20mΩ max. at DC 100mA.
Operating Temperature: -55°C~+105°C.

***RoHS Compliant**

Male

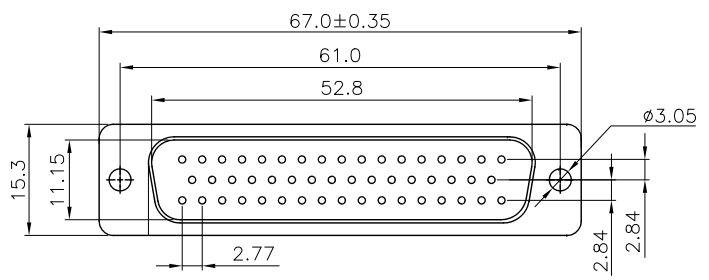



Female

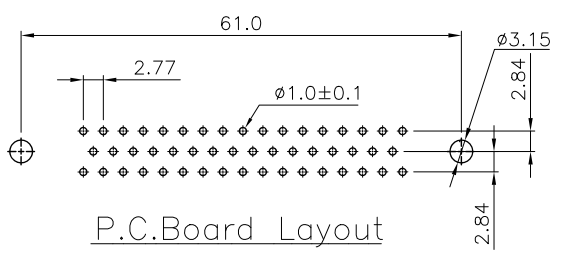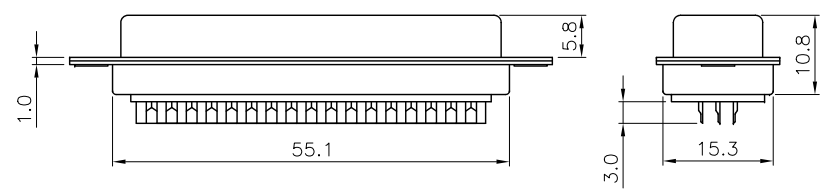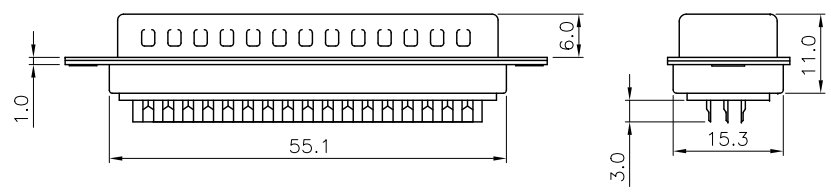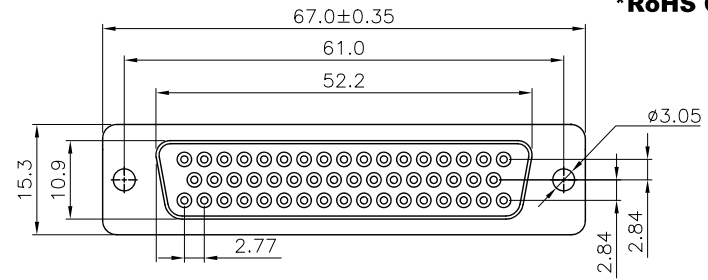

7907-50 M T B C 00 A

Series — 7907
Position — 50
M: Male
F: Female
B: Black
T: Tray Package
C: Selective Gold Plated
G: Gold Plated
00: G/F
30: 30 μ"

Tolerances	Dwg No.	7907D03005	Title:		 OUPIIN ELECTRONIC(KUNSHAN) CO., LTD. P/N: 7907-50MTBC00A&7907-50FTBC00A			
x. = ±0.50	Projection		7907 Series					
.x = ±0.25	Unit	mm	Scale	1:1	D-SUB Solder Cup Type			
.xx = ±0.15	Drawn By	jia-chi 04/17'18	① 767		SHEET	1/1	Ver.No.	A4