
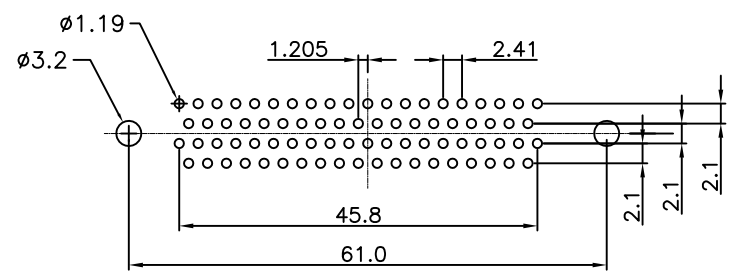
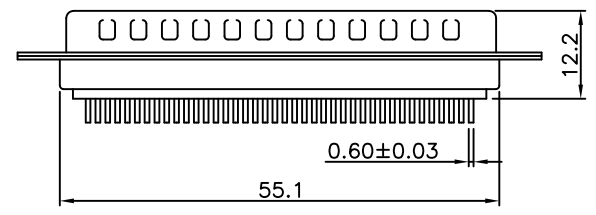

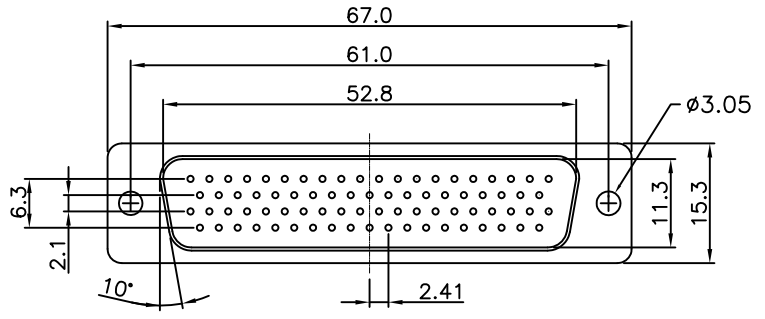


REV.	SPECIFICATION	ECN NO.	APPD.

Material:
Housing: PBT, UL94V-0.
Contacts: Brass, Gold Plated over Nickel 30 u" Min.
Shell: Steel.

Electrical Characteristics:
Current Rating: 1 AMP.
Dielectric Withstanding Voltage: AC 1000V For 1 minute.
Insulation Resistance: 1000MΩ min. at DC 500V.
Contact Resistance: 20mΩ max. at DC 100mA.
Operating Temperature: -55°C~+105°C.

***RoHS Compliant**



P.C. Board Layout

7915- 78 M T B G 00 A
Series ——— Position ——— M: Male ——— B: Black ——— W: White
————— G: Gold Plated
————— 00: G/F
————— A: Tray Package

Tolerances	Dwg. No.	7915D01001	Title:		OUPIN OUPIN ELECTRONIC(KUNSHAN) CO., LTD. P/N: 7915-78MTBG00A
x = ±0.5	Projection		7915 Series		
.x = ±0.25	Unit	mm	Scale	1:1	
.xx = ±0.15	Drawn By	Lucas	12/25'17	0767	SHEET 1/1
					Ver.No. A9