


| REV. | SPECIFICATION | ECN NO. | APPD. |
|------|---------------|---------|-------|
| | | | |

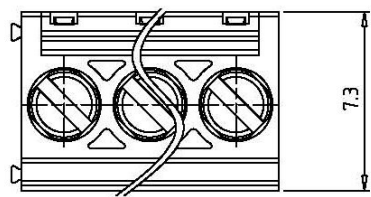



Material:

Housing: Thermoplastic Polyester UL94V-0.
Solder Pin: Copper Alloy, Tin Plated.
Clamp: Copper Alloy, Ni Plated.
Screw: Metal, Zinc Plated, M2.


Electrical Characteristics:

Voltage Rating: 300V
Current Rating: 10A
Solid Wire(AWG): 16-24
Stranded Wire(AWG): 16-24
Torque(Lb-In): 1.7
Wire Strip Length: 5-6mm
Withstanding Voltage: 1.6KV
Operating Temperature: -40°C~+115°C

***RoHS Compliant**

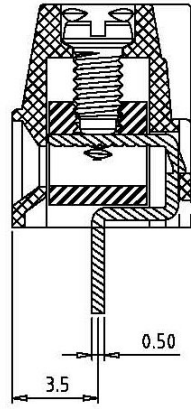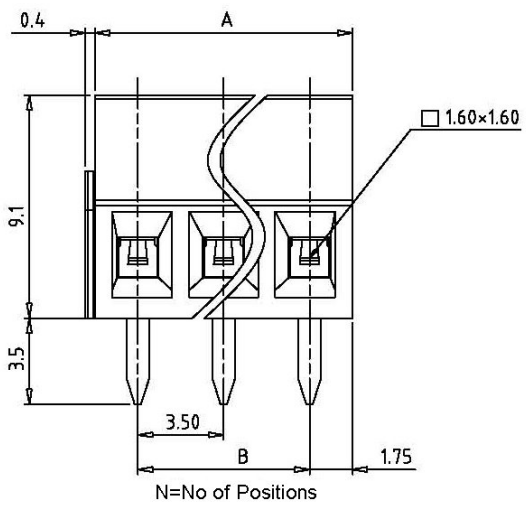

8932- Series **C** C:Pitch 3.5mm **073091** Manufacturing Code **G** G:Green B:Black Y:Grey U:Blue **AA** AA:Slotted "-"Screw **xx** No. of Positions **S** S:Straight **B** B:Bulk Package

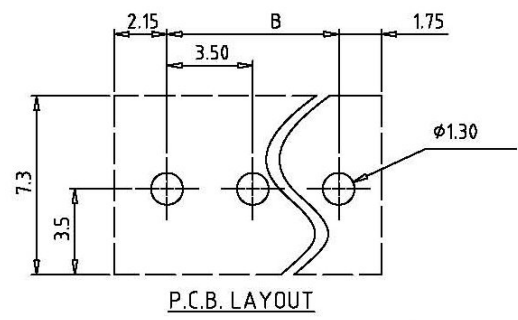

| Position | 02 | 03 | 04 | 05 | 06 | 07 | 08 | 09 | 10 | 11 | 12 | 13 |
|----------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| A | 7.00 | 10.50 | 14.00 | 17.50 | 21.00 | 24.50 | 28.00 | 31.50 | 35.00 | 38.50 | 42.00 | 45.50 |
| B | 3.50 | 7.00 | 10.50 | 14.00 | 17.50 | 21.00 | 24.50 | 28.00 | 31.50 | 35.00 | 38.50 | 42.00 |
| TOL | ±0.15 | | | | | | ±0.20 | | | | ±0.25 | |
| Position | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | |
| A | 49.00 | 52.50 | 56.00 | 59.50 | 63.00 | 66.50 | 70.00 | 73.50 | 77.00 | 80.50 | 84.00 | |
| B | 45.50 | 49.00 | 52.50 | 56.00 | 59.50 | 63.00 | 66.50 | 70.00 | 73.50 | 77.00 | 80.50 | |
| TOL | ±0.25 | | | | ±0.30 | | | | ±0.40 | | | |

| Tolerances | X. ±0.50 X.X ±0.30 X.XX ±0.10 |
|------------|-------------------------------------|
| Dwg. No. | S18130318-1 |
| Date | 20130318 |
| Unit | mm |
| Scale | 1/N T.S. |
| Drawn By | stanley chen |

Title:
8932 Series
3.5mm Terminal Block

OUPIIN
OUPIIN ELECTRONIC(KUNSHAN) CO., LTD.
P/N: 8932-C073091GAAXXSB

Ⓢ0 Ⓢ01 Ⓢ2
SHEET 1/1 **Ver.No.** X1