
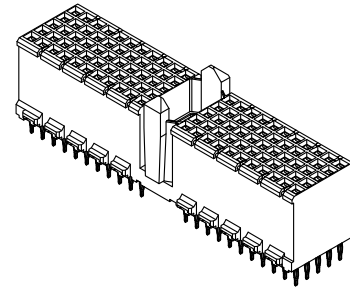


REV.	SPECIFICATION	ECN NO.	APPD.
R9		ECN241122	

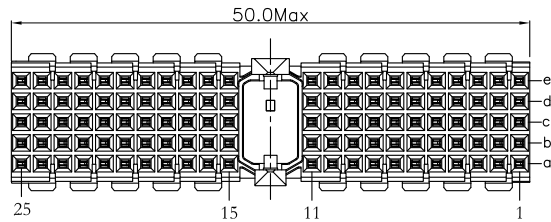

Material and Plating:

Housing: LCP, UL94V-0, Ivory.

Contacts: Phosphor bronze.

30u" Au+Pd/Ni on Contact Area and 80u" min Tin on Press Fit over 50 u" min Nickel.

Electrical Characteristics:

Current Rating: 1 AMP.



Dielectric Withstanding Voltage: AC 750V For 1 minute.

Insulator Resistance: 10000MΩ min. at DC 500V.


Contact Resistance: 20mΩ max. at DC 100mA.

Operating Temperature: -55°C ~+125°C .


*RoHS Compliant

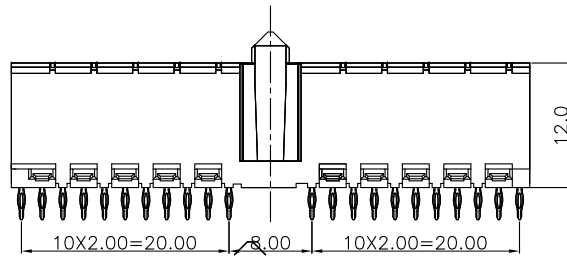


None Shielded




With Front Shielded





With Back Shielded



With Front & Back Shielded



With Spacer and With Front & Back Shielded

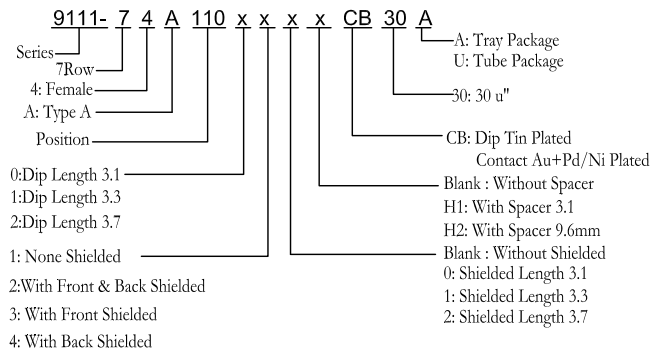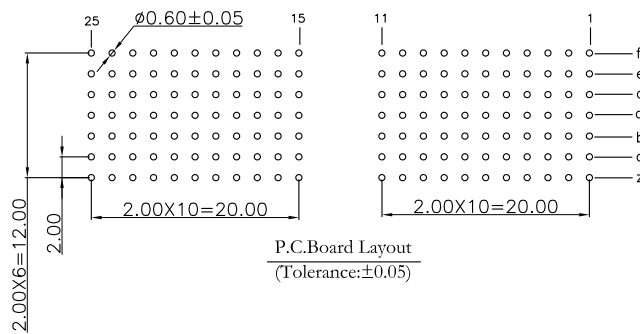

X	0	1	2
	Dip Length	3.1	3.3
Y	0	1	2
	Shielded Length	3.1	3.3
H	H1	H2	
	Spacer Length	3.1	9.6

Tolerances	Dwg. No.	9111D74001
x = ±0.5	Projection	
.x = ±0.25	Unit mm	Scale 1:1
.xx = ±0.15	Drawn By	CCH11/14/22

Title:
9111 Series
Hard Metric Connector
Female Straight Type A

OUPIN			
OUPIN ELECTRONIC(KUNSHAN) CO., LTD.			
P/N: 9111-74A110xxxxCB30A			
SHEET	1/1	Ver.No.	R9