
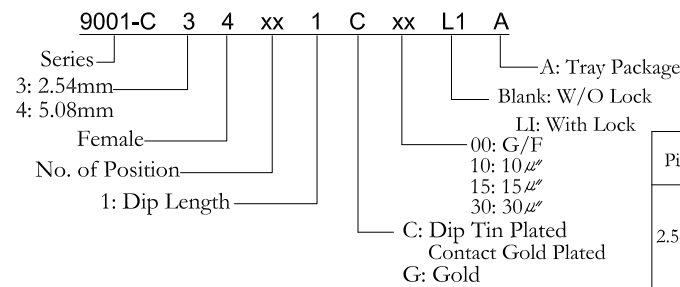
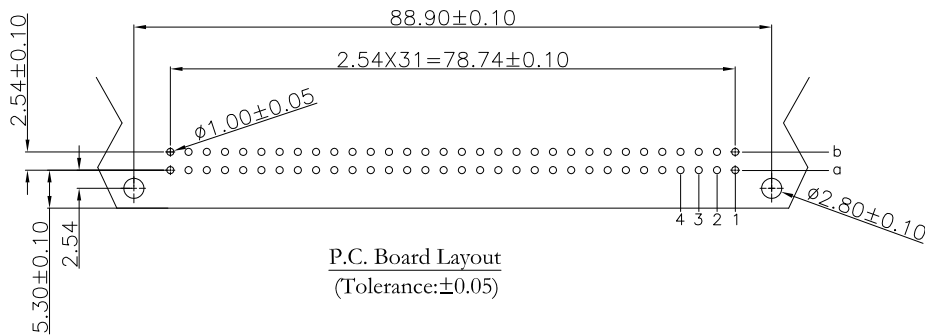

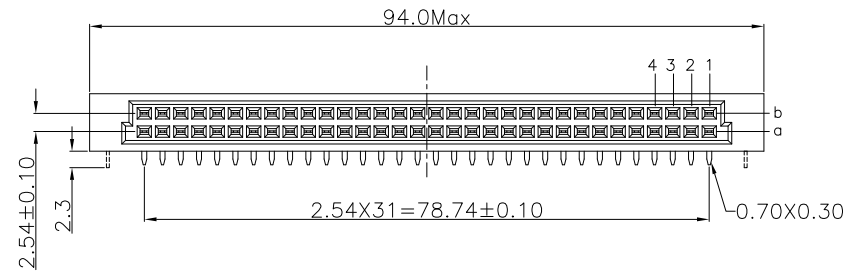


REV.	SPECIFICATION	ECN NO.	APPD.
R3X1			

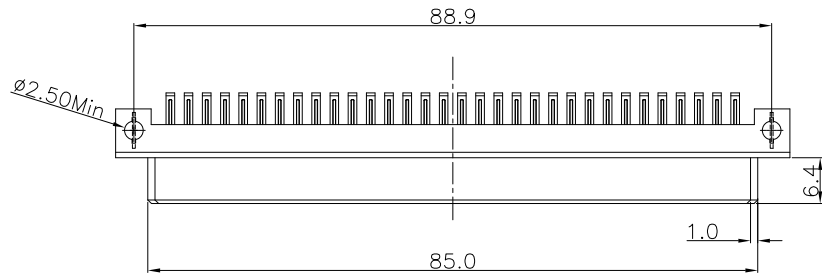

Material and Plating:

Housing: PBT ,UL94V-0,Beige.

Contacts: Phosphor Bronze.

Lock: Phosphor Bronze.

Gold Plated on Contact Area and 80u" Min Tin or Gold Flash Plated on Solder Tail over 50u" Min Nickel .

Electrical Characteristics:

Current Rating: 2 AMP.

Dielectric Withstanding Voltage: AC 1000V For 1 minute.

Insulator Resistance: 1000MΩ min. at DC 500V.

Contact Resistance: 20mΩ max. at DC 100mA.

Operating Temperature: -55°C~+125°C .

***RoHS Compliant**

Pitch	Position	Rows With Contacts	Contact Arrange	P/N
2.54mm	64	a b	4 3 2 1	9001-C34641CxxxA
	32	a -	4 3 2 1	9001-C34321CxxxA
5.08mm	32	a b	4 3 2 1	9001-C44321CxxxA
	16	a -	4 3 2 1	9001-C44161CxxxA

Tolerances	Dwg. No.	9001-D0000-006	
x = ±0.5	Projection		
.x = ±0.25	Unit	mm	Scale 1:1
.xx = ±0.15	Drawn By	XM 07/01'24	

Title: 9001-C Series
DIN41612 Q Type Female

OUPIN			
OUPIN ELECTRONIC(KUNSHAN) CO., LTD.			
P/N: 9001-C34xx1CxxL1A			
SHEET	1/1	Ver.No.	R3X1