

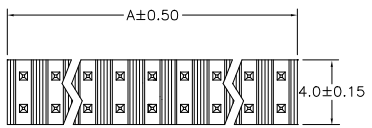



REV.	SPECIFICATION	ECN NO.	APPD.



Material:
Housing: PA6T, UL94V-0, Black.
Contacts: Brass, Gold Plated or 80~120u" Matte Tin Plated over Nickel 30~50u".

Electrical Characteristics:
Current Rating: 2 AMP.
Dielectric Withstanding Voltage: AC 500V.
Insulator Resistance: 1000MΩ min.
Contact Resistance: 20mΩ max.
Operating Temperature: -40°C~+105°C.
***RoHS Compliant**

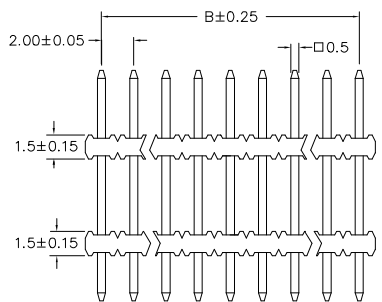

P.C. Board Layout

Dimension					
Positions	A	B	Positions	A	B
02	4.00	2.00			
03	6.00	4.00			
04	8.00	6.00	22	44.00	42.00
05	10.00	8.00	24	48.00	46.00
06	12.00	10.00	25	50.00	48.00
07	14.00	12.00	26	52.00	50.00
08	16.00	14.00	27	54.00	52.00
09	18.00	16.00	28	56.00	54.00
10	20.00	18.00	29	58.00	56.00
11	22.00	20.00	30	60.00	58.00
12	24.00	22.00	31	62.00	60.00
13	26.00	24.00	32	64.00	62.00
14	28.00	26.00	33	66.00	64.00
15	30.00	28.00	34	68.00	66.00
16	32.00	30.00	35	70.00	68.00
17	34.00	32.00	36	72.00	70.00
18	36.00	34.00	37	74.00	72.00
19	38.00	36.00	38	76.00	74.00
20	40.00	38.00	39	78.00	76.00
21	42.00	40.00	40	80.00	78.00

2113- 2 X xx G 00 S -L1-L2-L3 B
Series 2: Double Row No. of Pin Per Row G: Gold Plated T: Matte Tin Plated 00: Gold Flash Blank: For Matte Tin Plated S: Straight L1: Dip Length L2: Mate Length L3: Overall Length B: Bulk Package

ie: 2113-2XxxG00S-2.8-4-14.3B
2.8mm Dip Length (increment of 0.1mm)
4.0mm Mate Length (increment of 0.1mm)
14.3mm Overall Length (increment of 0.1mm)

Tolerances	Dwg No.	2113D01014		
.x = ±0.38 .xx = ±0.25	Projection	⊕ ↗		
	Unit mm	Scale	1:1	
	Drawn By	Martin 10/15'24		

Title: 2113 Series
Pin Header 2.0mmX2.0mm
Double Row Double Insulator
Straight Solder Type

OUPIIN
OUPIIN ELECTRONIC(KUNSHAN) CO., LTD.
P/N: 2113-2XxxG00S-L1-L2-L3B

SHEET	1/1	Ver.No.	A8
-------	-----	---------	----