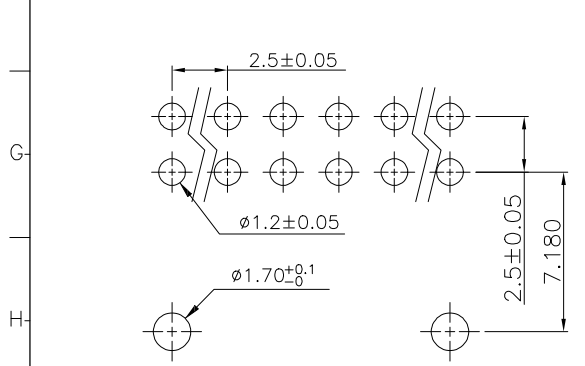
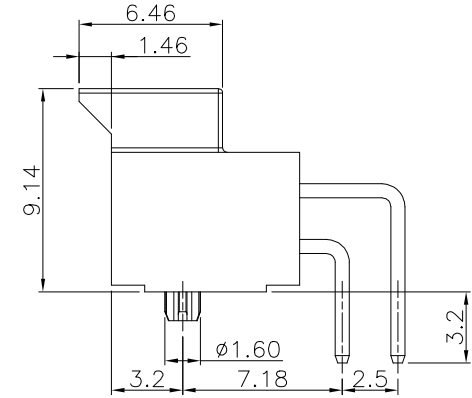
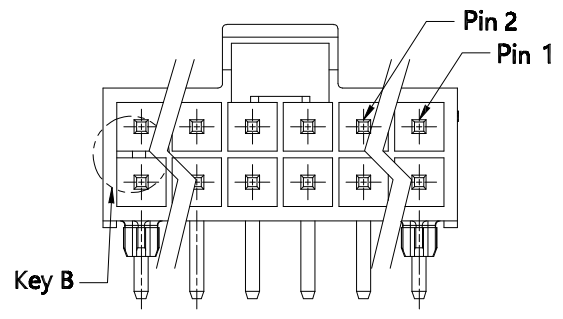
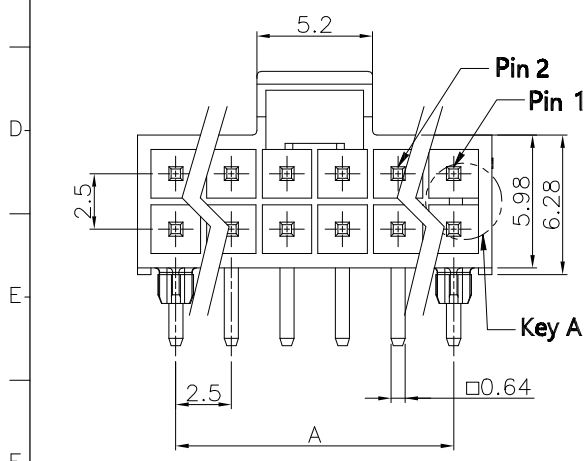


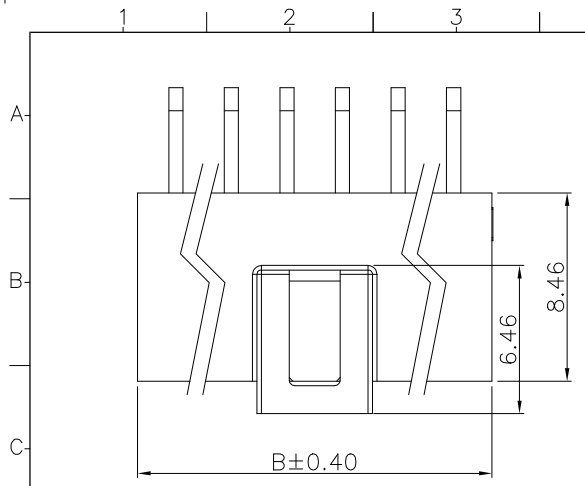


REV.	SPECIFICATION	ECN NO.	APPD.

Material:
Housing: LCP, UL94V-0.
Contacts: Brass, Tin 100u" over Nickel 30u".
Electrical Characteristics:
Current Rating: 4.5 AMP.
Dielectric Withstanding Voltage: AC 1500V.
Insulation Resistance: 1000MΩ min.
Contact Resistance: 10mΩ max.
Operating Temperature: -40°C~+105°C.
***RoHS Compliant**



4671- 2 X xx T R P x B
Series ———
Double Row ———
Positions ———
T: Tin Plated ———
R: Right Angle ———
P: With Post ———
B: Bulk Package ———
A: A Key Only Black Color ———
B: B Key Only Natural Color ———







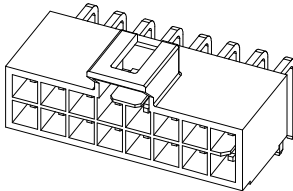
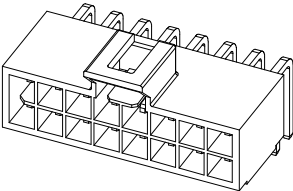
Positions	Dimensions	
	A	B
2X02	2.50	5.94
2X03	5.00	8.44
2X04	7.50	10.94
2X05	10.00	13.44
2X06	12.50	15.94
2X07	15.00	18.44
2X08	17.50	20.94





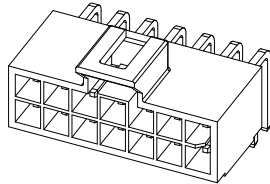
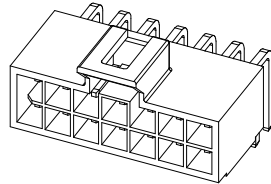
Tolerances	Dwg. No.	S2320220516-03
.x = ±0.4	Projection	
.xx = ±0.25	Unit	mm
.xxx = ±0.08	Scale	1:N
	Drawn By	Martin 10/28'22



Title: 4671 Series
Wafer 2.50mm Right Angle Type
Double Row with Post
①667

OUPIIN
OUPIIN ELECTRONIC(KUNSHAN) CO., LTD.
P/N: 4671-2XxxTRPxB
SHEET 1/2 Ver.No. X2

REV.	SPECIFICATION	ECN NO.	APPD.

02P	Key A / Black	02P	Key B / Natural
			
04P	Key A / Black	04P	Key B / Natural
			
06P	Key A / Black	06P	Key B / Natural
			
08P	Key A / Black	08P	Key B / Natural
			

03P	Key A / Black	03P	Key B / Natural
			
05P	Key A / Black	05P	Key B / Natural
			
07P	Key A / Black	07P	Key B / Natural
			

Tolerances .x = ±0.4 .xx = ±0.25 .xxx = ±0.08	Dwg. No.	S2320220516-03		Title: 4671 Series Wafer 2.50mm Right Angle Type Double Row with Post ① 667	 OUPIIN ELECTRONIC(KUNSHAN) CO., LTD. P/N: 4671-2XxxTRPxB
	Projection				
	Unit	<i>mm</i>	Scale		
	Drawn By	Martin 10/28'22		SHEET	2/2
				Ver.No.	X2